

F-PODIUM CARBON DC (SPE), CARBON/CHERRY RED, 2022

obj. č: 010.22052SPE



Technické specifikace

vyráběné velikosti

S: 390mm / M: 420mm / L: 470mm / XL: 510mm

hmotnost

12,4 Kg

rám

F-Podium 29 Stealth Air Full Carbon, XCO Optimized Zero Suspension System, 115mm, XC Forward Geometry, Carbon Monoblock upper link, BSA bottom bracket, tapered head tube, HHG internal cable routing, dedicated 1X drivetrain design, Boost 12x148mm rear axle, shock mudguard, postmount rear brake mount.

vidlice

Fox 34 Step Cast Float Grip Evol Performance, 120mm, tapered steerer tube, 15x110mm Boost axle, offset 44mm. Settings: remote 2pos Push-unlock, rebound, air preload. Fox dual pull

hlavové složení

Acros AZX-239 R1 Block Lock, ZS44/28.6 top, ZS56/40 bottom

přehazovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

řazení

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram Level TL, Direct Link actuation, tooled reach adjust, lever pivot bushings

kliky

Truvativ Stylo 6K Eagle, 12s, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm

středové složení

Sram DUB BSA, sealed bearings, 73mm

řídítka

Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 760mm, 9° backsweep, 0° upsweep, 31.8mm barbore

představec

MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5°, length: sizes S/M: 50mm, size L: 60mm, size XL: 70mm

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M/L/XL size 387x125mm

sedlo

Fizik Antares R7

náboj přední

Mavic, Boost 15x110mm, IS 6 bolts

náboj zadní

Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts

řetěz

Sram SX Eagle, 12s, Powerlock

kazeta

Sram XG-1230, 11-50T, 12s

dráty

Mavic straightpull double butted, contactless lacing

ráfky

Mavic Crossmax 29, 25mm internal width, welded rim, hookless, tubeless ready, 24 spokes

pláště

Maxxis Rekon Race 29x2.4, EXO protection, tubeless ready, 120TPI, folding bead, Maxxis Rekon Race 29x2.4, EXO protection, tubeless ready, 120TPI, folding bead

a151

010.22052SPE

obj.c.

010.22052SPE

gripy

Onoff Twin, 1lock-on, 135mm

tlumič
Fox Float DPS SV Performance Elite, 185x50mm. Settings: 2 position remote compression (open/lock), low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings

zadní brzda
Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad


převodník
34T, steel, X-Sync 2

přední brzda
Sram Level TL, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad

nastavení tlumiče
Firm compression, light rebound, air volume spacer 0.2

patka k přehazovačce
Sram UDH

Geometrie

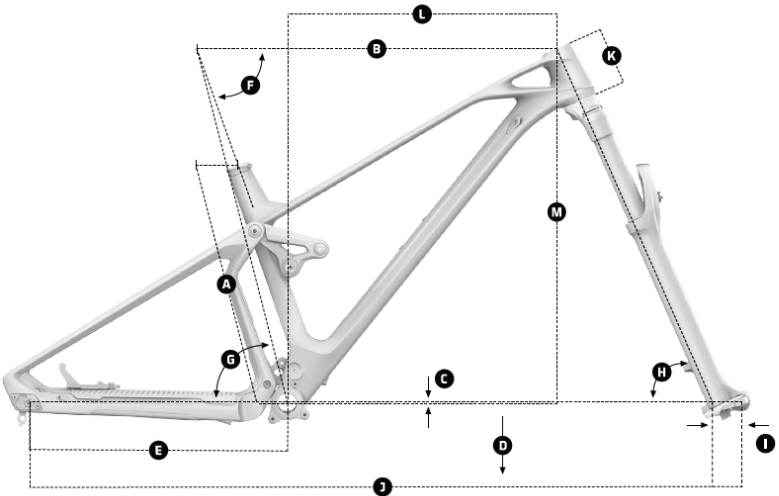

A	Seat Tube Length
B	Top Tube Length
C	Bottom Bracket Drop
D	Bottom Bracket Height
E	Chainstay Length
F	Seat Tube Angle, Actual
G	Seat Tube Angle, Effective
H	Head Tube Angle
I	Fork Offset
J	Wheelbase
K	Head Tube Length
L	Reach
M	Stack

XC RACE
F-PODIUM DC

Size	S	M	L	XL
A Seat Tube Length	390 mm	420 mm	470 mm	510 mm
B Top Tube Length	583 mm	603 mm	629 mm	654 mm
C Bottom Bracket Drop	-31 mm	-31 mm	-31 mm	-31
D Bottom Bracket Height	337 mm	337 mm	337 mm	337 mm
E Chainstay Legth	432 mm	432 mm	432 mm	432 mm
F Seat Tube Angle, Actual	70.8°	70.8°	70.8°	70.8°
G Seat Tube Angle, Effective	75.1°	75.1°	75.1°	75.1°
H Head Tube Angle	66.8°	66.8°	66.8°	66.8°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1146 mm	1167 mm	1191 mm	1217 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	430 mm	450 mm	470 mm	490 mm
M Stack	577 mm	582 mm	591 mm	605 mm

Fotogalerie

