

SUMMUM R 29, YELLOW/BLUE, 2021

obj. č: 010.21113



Doporučená cena

142.999 Kč

Technické specifikace

barva rámečku
yellow/blue

vyráběné velikosti
S 400mm / M 400mm / L 400mm / XL 400mm

hmotnost
17,5 Kg

rám
Summum 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero suspension system, 200mm travel, Forward Geometry, alloy upper link with shock eyelet bearings, SuperBoost 12x157mm rear axle, 83mm BSA bottom bracket, MAX. capacity dual raw Enduro bearings, HHG internal cable routing, ISCG 05. Optional geometry kit: +-1 / +2 headset cups

vidlice
Fox 40 29 Float FIT GRIP EVOL Performance, 203mm, air spring, 1-1/8 steerer tube, 20x110mm axle, offset 56mm. Settings: low-speed compression, low-speed rebound, air preload

hlavové složení
Onoff Mercurium 1.5 ZS for 1-1/8 steerer tube, 41x30.15x7x45x45 ACB sealed bearings, geometry kit cups, external diameter 56mm

přehazovačka
Sram GX DH, 7s, medium cage, X-actuation 1:1

přesmykač
E.13 LG1+ Race Carbon chain guide, IFD DMB (Direct mount Bashguard) Gen 2 Stealth Idler, Aluminum hardware, adjustable/replaceable lower armature, polycarbonate, ISCG 05, adjustable upper slider

řazení
Sram trigger GX DH 7s, X-actuation 1:1

brzdové páčky
Sram Code R, tool-free reach adjust

kliky
Truvativ Descendant DH, DUB axle, Direct mount chain ring, 165mm

středové složení
Sram DUB BSA, sealed bearings, 83mm

řídítka
Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

představec
Onoff Krypton DH CNC Integrated FG, 25-30mm adjustable length, 31.8mm barbore, 6061 alloy, 2x6mm spacer

sedlovka
SDG Micro I-Beam SP-751 Alloy, diameter 31.6mm, length 300mm, micro-adjustment

sedlo
SDG I-Fly 2.0 I-Beam, high-density PU foam, Cordura sides

náboj přední
e thirteen Boost 20x110mm, triple-sealed, fully machined aluminum, IS 6 bolts


náboj zadní
e thirteen Superboost 12x157mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts

řetěz
Sram PC1110 11s, Powerlock

kazeta
Sram PG 720 11-25T, 7s

dráty e thirteen custom Hive triple-buttet black alloy, alloy nipples, nipple washers	ráfky e thirteen LG1 Plus DH, IW29 Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 32 spokes
pláště Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead	obj.c. 010.21113
tlumič Fox DHX2 Performance Elite, 225x70mm. Settings: low-speed compression, low-speed rebound, spring preload. Trunnion top mount, 30x8mm bottom bushings	přední brzda Sram Code R, oversized 4-piston caliper, Centerline 203mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
zadní brzda Sram Code R, oversized 4-piston caliper, Centerline 203mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads	omotávka Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead
nastavení tlumiče ECC010 compression, ECR012 rebound. Spring rate: S size 400 lbs, M size 450 lbs, L/XL size 500 lbs	převodník 34T, steel, X-SYNC
patka k přehazovačce Mondraker M068	

Geometrie

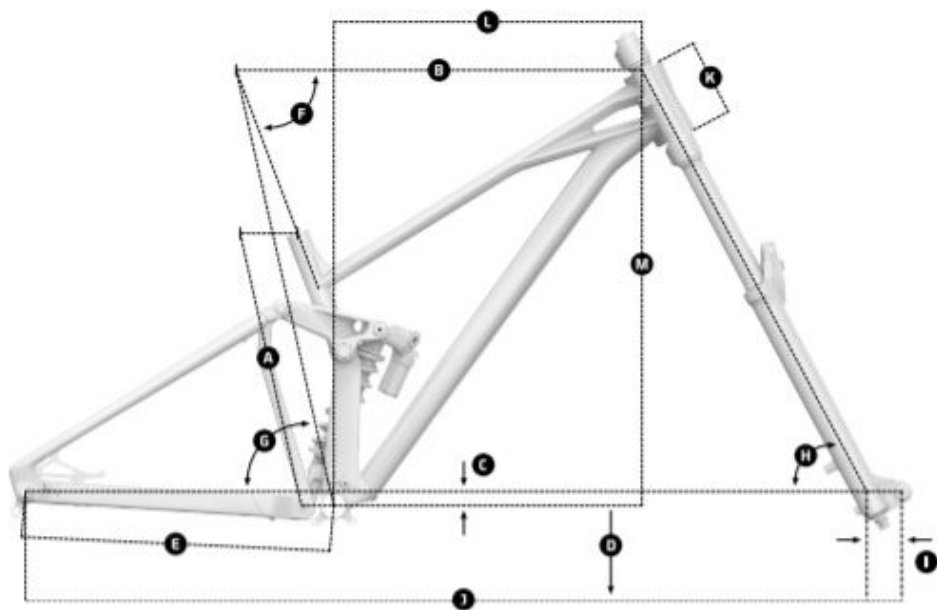

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	400 mm	400 mm	400 mm	400 mm
B Top Tube Length	573 mm	593 mm	618 mm	643 mm
C Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	450 mm	450 mm	450 mm	450 mm
F Seat Tube Angle, Actual	69°	69°	69°	69°
G Seat Tube Angle, Effective	77°	77°	77°	77°
H Head Tube Angle	63.5°	63.5°	63.5°	63.5°
I Fork Offset	58 mm	58 mm	58 mm	58 mm
J Wheelbase	1260 mm	1270 mm	1295 mm	1320 mm
K Head Tube Length	112 mm	112 mm	112 mm	112 mm
L Reach	430 mm	450 mm	475 mm	500 mm
M Stack	632 mm	632 mm	632 mm	632 mm