

SUMMUM R 29, YELLOW/BLUE, 2021

obj. č.: 010.21113



Doporučená cena
142.999 Kč

Technické specifikace

barva rámečku
yellow/blue

vyráběné velikosti
S 400mm / M 400mm / L 400mm / XL 400mm

hmotnost
17,5 Kg

rám
Summum 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero suspension system, 200mm travel, Forward Geometry, alloy upper link with shock eyelet bearings, SuperBoost 12x157mm rear axle, 83mm BSA bottom bracket, MAX. capacity dual raw Enduro bearings, HHG internal cable routing, ISCG 05. Optional geometry kit: +1 / +2 headset cups

vidlice
Fox 40 29 Float FIT GRIP EVOL Performance, 203mm, air spring, 1-1/8 steerer tube, 20x110mm axle, offset 56mm. Settings: low-speed compression, low-speed rebound, air preload

hlavové složení
Onoff Mercurium 1.5 ZS for 1-1/8 steerer tube, 41x30.15x7x45x45 ACB sealed bearings, geometry kit cups, external diameter 56mm

přehazovačka
Sram GX DH, 7s, medium cage, X-actuation 1:1

přesmykač
E.13 LG1+ Race Carbon chain guide, IFD DMB (Direct mount Bashguard) Gen 2 Stealth Idler, Aluminum hardware, adjustable/replaceable lower armature, polycarbonate, ISCG 05, adjustable upper slider

řazení
Sram trigger GX DH 7s, X-actuation 1:1

brzdové páčky
Sram Code R, tool-free reach adjust

kliky

Truvativ Descendant DH, DUB axle, Direct mount chain ring, 165mm

středové složení

Sram DUB BSA, sealed bearings, 83mm

řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore
Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

představec

Onoff Krypton DH CNC Integrated FG, 25-30mm adjustable length, 31.8mm barbore, 6061 alloy, 2x6mm spacer

sedlovka

SDG Micro I-Beam SP-751 Alloy, diameter 31.6mm, length 300mm, micro-adjustment

sedlo

SDG I-Fly 2.0 I-Beam, high-density PU foam, Cordura sides

náboj přední

e thirteen Boost 20x110mm, triple-sealed, fully machined aluminum, IS 6 bolts

náboj zadní

e thirteen Superboost 12x157mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts

řetěz

Sram PC1110 11s, Powerlock

kazeta

Sram PG 720 11-25T, 7s

dráty

e thirteen custom Hive triple-buttet black alloy, alloy nipples, nipple washers

ráfky

e thirteen LG1 Plus DH, IW29 Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 32 spokes

pláště

Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead

obj.c.

010.21113

tlumič

Fox DHX2 Performance Elite, 225x70mm. Settings: low-speed compression, low-speed rebound, spring preload. Trunnion top mount, 30x8mm bottom bushings

přední brzda

Sram Code R, oversized 4-piston caliper, Centerline 203mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

zadní brzda

Sram Code R, oversized 4-piston caliper, Centerline 203mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

plášť zadní

Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead

nastavení tlumiče

ECC010 compression, ECR012 rebound. Spring rate: S size 400 lbs, M size 450 lbs, L/XL size 500 lbs


převodník

34T, steel, X-SYNC

patka k přehazovačce

Mondraker M068

Geometrie

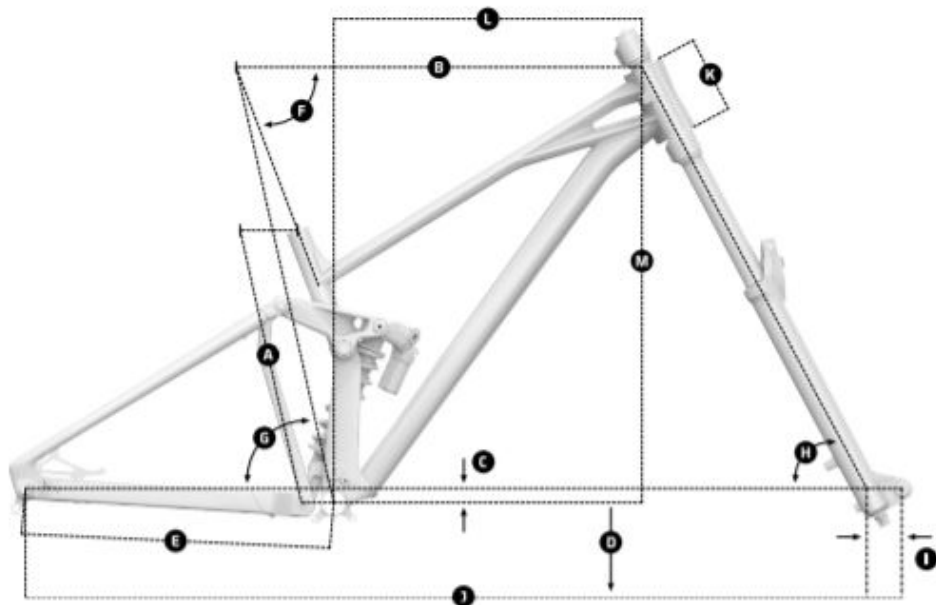

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	400 mm	400 mm	400 mm	400 mm
B Top Tube Length	573 mm	593 mm	618 mm	643 mm
C Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	450 mm	450 mm	450 mm	450 mm
F Seat Tube Angle, Actual	69°	69°	69°	69°
G Seat Tube Angle, Effective	77°	77°	77°	77°
H Head Tube Angle	63.5°	63.5°	63.5°	63.5°
I Fork Offset	58 mm	58 mm	58 mm	58 mm
J Wheelbase	1260 mm	1270 mm	1295 mm	1320 mm
K Head Tube Length	112 mm	112 mm	112 mm	112 mm
L Reach	430 mm	450 mm	475 mm	500 mm
M Stack	632 mm	632 mm	632 mm	632 mm