

F-PODIUM DC CARBON R, GREEN/CARBON/YELLOW, 2021

obj. č. 010.21053



Technické specifikace

barva rámečku

green/carbon/yellow

vyráběné velikosti

S 390mm / M 420mm / L 470mm / XL 510mm

hmotnost

11,7 Kg

rám

F-Podium 29 Stealth Air Full Carbon, XCO Optimized Zero Suspension System, 100mm, XC Forward Geometry, Carbon Monoblock upper link, BSA bottom bracket, tapered head tube, HHG internal cable routing, dedicated 1X drivetrain design, Boost 12x148mm rear axle, shock mudguard, postmount rear brake mount.

vidlice

Fox 34 29 Float FIT4 EVOL Step Cast Factory Kashima, 120mm, tapered steerer tube, 15x110mm Boost axle, offset 44mm. Settings: remote lockout, compression micro-adjustment at low-speed, rebound, air preload

hlavové složení

Acros AZX-239 R1 Block Lock, ZS44/28.6 top, ZS56/40 bottom

přehazovačka

Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

řazení

Sram Trigger GX Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram Level TL, Direct Link actuation, tooled reach adjust, lever pivot bushings

kliky

Sram X1 Carbon Eagle, Boost, DUB axle, Direct mount chain ring, S size: 170mm, M/L/XL size: 175mm

středové složení

Sram DUB BSA, sealed bearings, 73mm

řídítka

Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 760mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

představec

MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5, length: sizes S/M: 50mm, size L: 60mm, size XL: 70mm

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M/L/XL size 387x125mm

sedlo

Fizik Antares R7

náboj přední

DT 370, Boost 15x110mm, IS 6 bolts

náboj zadní

DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts, MS freehub

řetěz

Sram GX Eagle, 12s, Powerlock

kazeta

Sram XG-1275, 10-50T, 12s

dráty

DT Champion, straightpull

ráfky

DT Swiss XRC1750 Carbon Spline 29, 30mm internal width, hookless, tubeless ready, 28 spokes

pláště

Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead

obj.c.

010.21053

tlumič

Fox Float DPS SV EVOL Factory Kashima, 185x47,5mm. Settings: 2 position remote compression (open/lock), low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings

přední brzda

Sram Level TL, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad

zadní brzda

Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

plášť zadní

Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead

nastavení tlumiče

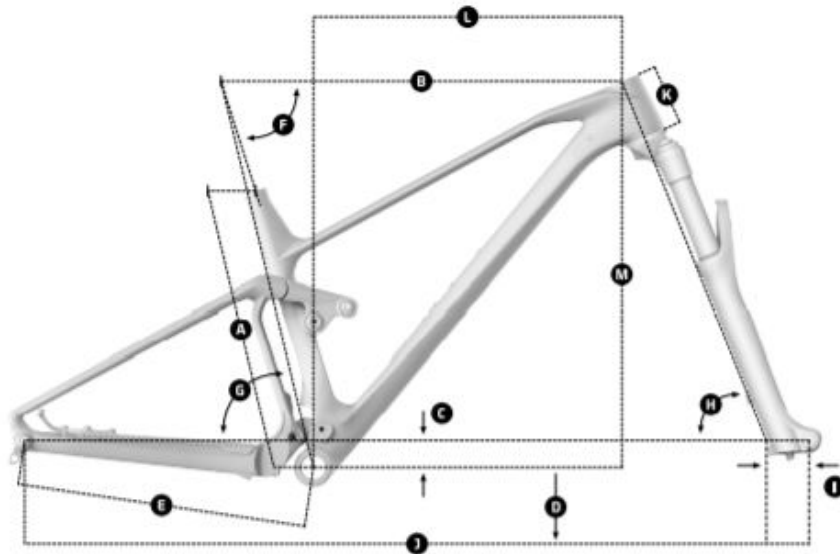
Firm compression, light rebound, air volume spacer 0.2

převodník

34T, CNC-machined alloy, X-SYNC 2

patka k přehazovače

Sram UDH

Geometrie**GEOMETRY**

Size	S	M	L	XL
A Seat Tube Length	390 mm	420 mm	470 mm	510 mm
B Top Tube Length	583 mm	603 mm	629 mm	654 mm
C Bottom Bracket Drop	-31 mm	-31 mm	-31 mm	-31 mm
D Bottom Bracket Height	337 mm	337 mm	337 mm	337 mm
E Chainstay Length	432 mm	432 mm	432 mm	432 mm
F Seat Tube Angle, Actual	70.8°	70.8°	70.8°	70.8°
G Seat Tube Angle, Effective	75.1°	75.1°	75.1°	75.1°
H Head Tube Angle	66.8°	66.8°	66.8°	66.8°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1146 mm	1167 mm	1191 mm	1217 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	430 mm	450 mm	470 mm	490 mm
M Stack	577mm	582mm	591 mm	605mm