

F-PODIUM CARBON R, CARBON/YELLOW/GREEN, 2021

obj. č. 010.21041



Doporučená cena

176.799 Kč

Technické specifikace

barva rámečku

carbon/yellow/green

vyráběné velikosti

S 390mm / M 420mm / L 470mm / XL 510mm

hmotnost

10,8 Kg

rám

F-Podium 29 Stealth Air Full Carbon, XCO Optimized Zero Suspension System, 100mm, XC Forward Geometry, Carbon Monoblock upper link, BSA bottom bracket, tapered head tube, HHG internal cable routing, dedicated 1X drivetrain design, Boost 12x148mm rear axle, shock mudguard, postmount rear brake mount.

vidlice

Fox 32 29 Float FIT4 EVOL Step Cast Factory Kashima, 100mm, tapered steerer tube, 15x110mm Boost axle, remote lockout, offset 44mm. Settings: lockout, compression micro-adjustment at low-speed, rebound, air preload

hlavové složení

Acros AZX-239 R1 Block Lock, ZS44/28.6 top, ZS56/40 bottom

přehazovačka

Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

řazení

Sram Trigger GX Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram Level TL, Direct Link actuation, tooled reach adjust, lever pivot bushings

kliky

Sram X1 Carbon Eagle, Boost, DUB axle, Direct mount chain ring, S size: 170mm, M/L/XL size: 175mm

středové složení

Sram DUB BSA, sealed bearings, 73mm

řídítka

Onoff Helium Carbon 0.2, rise: 4.8mm, width: 760mm, 9 backsweep, 0 upsweep, 31.8mm barbore Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

představec

MDK, 6061 T6 Alloy, 31.8mm bar bore, rise: +/-5, length: sizes S/M: 50mm, size L: 60mm, size XL: 70mm

sedlovka

Onoff Helium Carbon 0-R, diameter 31.6mm, length 400mm

sedlo

Fizik Antares R7

náboj přední

DT 370, Boost 15x110mm, IS 6 bolts

náboj zadní

DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts, MS freehub

řetěz

Sram GX Eagle, 12s, Powerlock

kazeta

Sram XG-1275, 10-50T, 12s

dráty

DT Champion, straightpull

ráfky

DT Swiss XRC1750 Carbon Spline 29, 30mm internal width, hookless, tubeless ready, 28 spokes

pláště

Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead

obj.c.

010.21041

tlumič

Fox Float DPS SV EVOL Factory Kashima, 185x47,5mm. Settings: 2 position remote compression (open/lock), low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings

přední brzda

Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

zadní brzda

Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

plášť zadní

Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead

nastavení tlumiče

Firm compression, light rebound, air volume spacer 0.2


převodník

34T, CNC-machined alloy, X-SYNC 2

patka k přehazovačce

Sram UDH

Geometrie

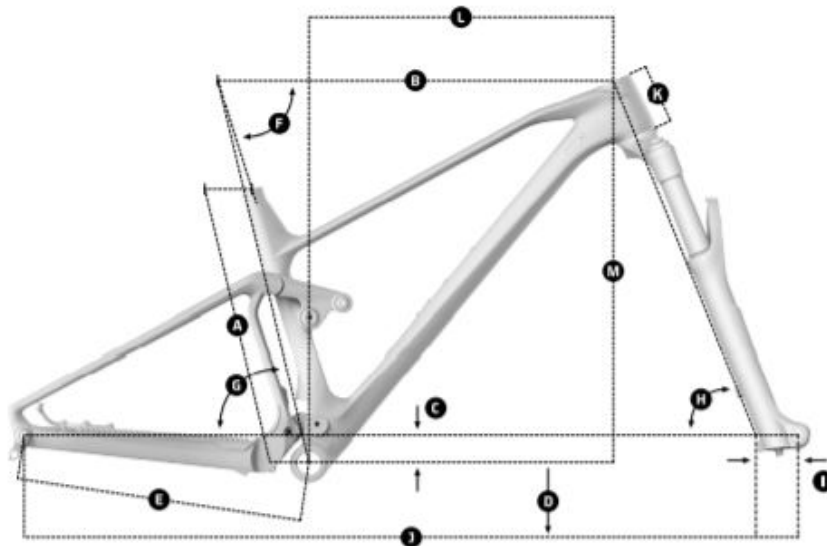

GEOMETRY

| Size | S | M | L | XL |
|-------------------------------------|---------|---------|---------|---------|
| A Seat Tube Length | 390 mm | 420 mm | 470 mm | 510 mm |
| B Top Tube Length | 580 mm | 600 mm | 625 mm | 650 mm |
| C Bottom Bracket Drop | -40 mm | -40 mm | -40 mm | -40 mm |
| D Bottom Bracket Height | 325 mm | 325 mm | 325 mm | 325 mm |
| E Chainstay Length | 432 mm | 432 mm | 432 mm | 432 mm |
| F Seat Tube Angle, Actual | 72° | 72° | 72° | 72° |
| G Seat Tube Angle, Effective | 76.5° | 76.5° | 76.5° | 76.5° |
| H Head Tube Angle | 68° | 68° | 68° | 68° |
| I Fork Offset | 44 mm | 44 mm | 44 mm | 44 mm |
| J Wheelbase | 1132 mm | 1153 mm | 1177 mm | 1203 mm |
| K Head Tube Length | 85 mm | 90 mm | 100 mm | 115 mm |
| L Reach | 440 mm | 460 mm | 480 mm | 500 mm |
| M Stack | 570 mm | 575 mm | 584 mm | 598 mm |