

CHRONO CARBON R 29, CHERRY RED/CARBON, 2022

obj. č.: 010.22024



Chcete lehké, perfektně ovladatelné a výkonné kolo?Chrono carbon R splňuje všechny tyto požadavky a díky rámu STEALTH FULL CARBON je i pohodlné. Dokonalá rovnováha vlastností, pokud si chcete kolo užít při etapovém závodě, jednodenním závodě nebo třeba jen při víkendové vyjíždce v horách. Jeho obratnost vám pomůže užít si nekonečné traily a jeho FORWARD GEOMETRIE vám umožní vše zvládnout optimálně a bezpečně. Je vyroben s použitím kvalitních komponentů, které vám vše ještě více usnadní: RockShox SID SL Base se zdvihem 100 mm, kola Mavic Crossmax, 12rychlostní pohon SRAM GX Eagle a komponenty ONOFF.Chcete lehké, perfektně ovladatelné a výkonné kolo?


Technické specifikace

vyráběné velikosti S: 395mm / M: 430mm / L: 470mm / XL: 520mm	hmotnost 10,3 kg
rám Chrono 29 Stealth full Carbon, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable routing, Boost 12x148mm rear axle, Comfort Flat chainstays (Flatstays) design	vidlice Rockshox SID SL Base RL 29, 100mm, Charger, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload
hlavové složení Onoff Titan tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41.8x30.5x8x45°x45°, bottom 51.9x40x8x45°x45°	přehazovačka Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1
řazení Sram Trigger NX Eagle, 12s, X-Actuation 1:1	brzdové páčky Sram Level, tooled reach adjust, lever pivot bushings
kliky Truvativ Stylo 6K Eagle, 12s, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm	středové složení Sram DUB BSA, sealed bearings, 73mm
řídítka Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 760mm, 9° backsweep, 0° upsweep, 31.8mm barbore	představec MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5°, length: size S: 60mm, size M: 70mm, size L: 80mm, size XL: 90mm
sedlovka Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm	sedlo Mondraker XC Series, steel rail
náboj přední Mavic, Boost 15x110mm, IS 6 bolts	náboj zadní Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts
řetěz Sram SX Eagle, 12s, Powerlock	kazeta Sram XG-1230, 11-50T, 12s
dráty Mavic straightpull duble butted, contactless lacing	ráfky Mavic Crossmax 29, 25mm internal width, welded rim, hookless, tubeless ready, 24 spokes

pláště
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, **a151**
folding bead, Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless 010.22024
ready, 120TPI, folding bead

obj.c. 010.22024	gripy Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 760mm, 9° backsweep, 0° upsweep, 31.8mm barbore
přední brzda Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	zadní brzda Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
převodník 34T, steel, X-Sync 2	patka k přehazovačce Mondraker M068

Geometrie

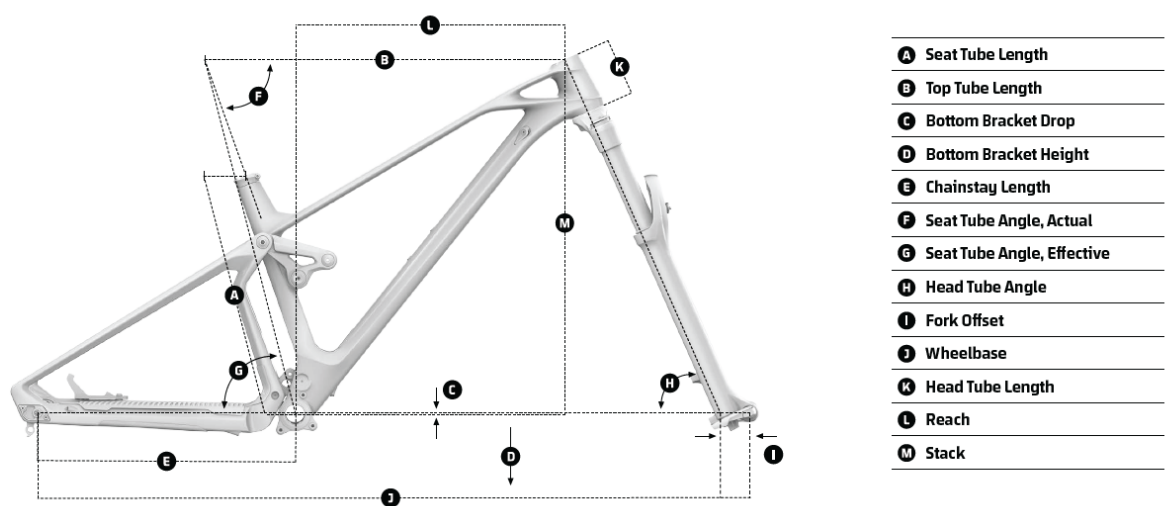

XC PRO CHRONO CARBON

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	72°	72°	72°	72°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 / 51 mm	44 / 51 mm	44 / 51 mm	44 / 51 mm
J Wheelbase	1086 mm	1106 mm	1127 mm	1148 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	411 mm	430 mm	447 mm	463 mm
M Stack	605 mm	610 mm	619 mm	632 mm

Fotogalerie

