

CRAFTY CARBON R, CARBON/WHITE/RED, 2021

obj. č.: 010.21259



Doporučená cena

202.799 Kč

Technické specifikace

barva rámečku
carbon/white/red

vyráběné velikosti
S 380mm / M 420mm / L 450mm / XL 490mm

hmotnost
22 Kg

rám
Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

vidlice
Fox 36 29 Float FIT GRIP EVOL Performance, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

hlavové složení
Acros custom for 1-1/2 head tube, angular contact bearings 40x52x7, Internal cable routing

přehazovačka
Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

řazení
Sram Trigger NX Eagle, 12s, X-Actuation 1:1, single click

brzdové páčky
Sram G2 RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust

kliky
Race Face Aeffect, 165mm

řídítka
Onoff Krypton 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9° backsweep, 5 upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

představec
Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbare

sedlovka
Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

sedlo
Fizik Antares R7

náboj přední
DT 370, Boost 15x110mm, IS 6 bolts

náboj zadní
DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts

řetěz
Sram NX Eagle, 12s, Powerlock

kazeta
Sram XG-1230, 11-50T, 12s

dráty
DT Hybrid SP, straightpull

ráfky
DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes

pláště
Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

obj.c.
010.21259

tlumič

Fox Float DPS Performance, 205x65mm. Settings: Compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

zadní brzda

Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

nastavení tlumiče

Medium compression, Medium rebound, 0.4 volume spacer

patka k přehazovačce

Mondraker M068

přední brzda

Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads

omotávka

Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead


převodník

Sram X-Sync 2 Eagle 34T, alloy, narrow-wide, 104 BCD

motor+baterie

Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Kiox, Bosch Powertube 625Wh

Geometrie

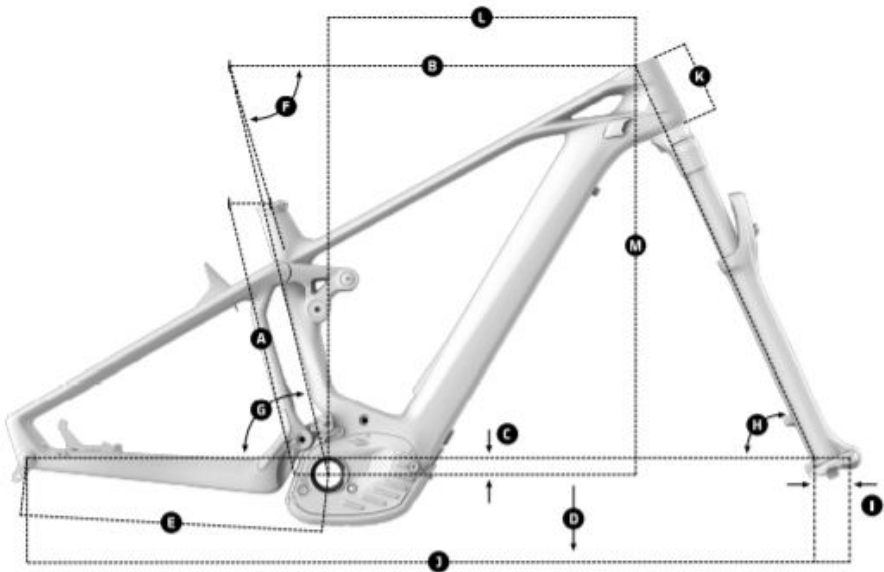

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	480 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1270 mm	1290 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm