

CHRONO CARBON RR, CARBON/BLEU/BLEU, 2021

obj. č.: 010.21021




Technické specifikace

barva rámečku carbon/blue/blue	vyráběné velikosti S 395mm / M 430mm / L 470mm / XL 520mm
hmotnost 10,2 Kg	rám Chrono 29 Stealth full Carbon, XC Forward Geometry, 73mm BSA bottom bracket, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload
vidlice Rockshox SID SL Ultimate RL 29, 100mm, Charger Race day, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload	hlavové složení Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45
přehazovačka Shimano XT M8100, SGS, Shadow+, 12s	řazení Shimano Deore M6100, Rapid Fire Plus, 12s
brzdové páčky Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings	kliky Shimano XT M8100 Boost, Hollowtech II, Q-factor 172mm, S size: 170mm, M/L/XL size: 175mm
středové složení Shimano XT MT800 BSA, 68/73mm	řídítka Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL /
představec MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5, length: size S: 60mm, size M: 70mm, size L: 80mm, size XL: 90mm	sedlovka Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm
sedlo Mondraker XC Series, steel rail	náboj přední DT 370, Boost 15x110mm, IS 6 bolts
náboj zadní DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts, MS freehub	řetěz Shimano Deore M6100, 12s, Quick-link
kazeta Shimano Deore M6100, 10-51T Hyperglide+, 12s	dráty DT Champion, straightpull
ráfky DT Swiss X1900 Spline 29, 25mm internal width, sleeved aluminum, tubeless ready, 28 spokes	pláště Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead
obj.c. 010.21021	přední brzda Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad

zadní brzda Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	omotávka Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead
převodník 34T, CNC-machined alloy	patka k přehazovačce Mondraker M068

Geometrie

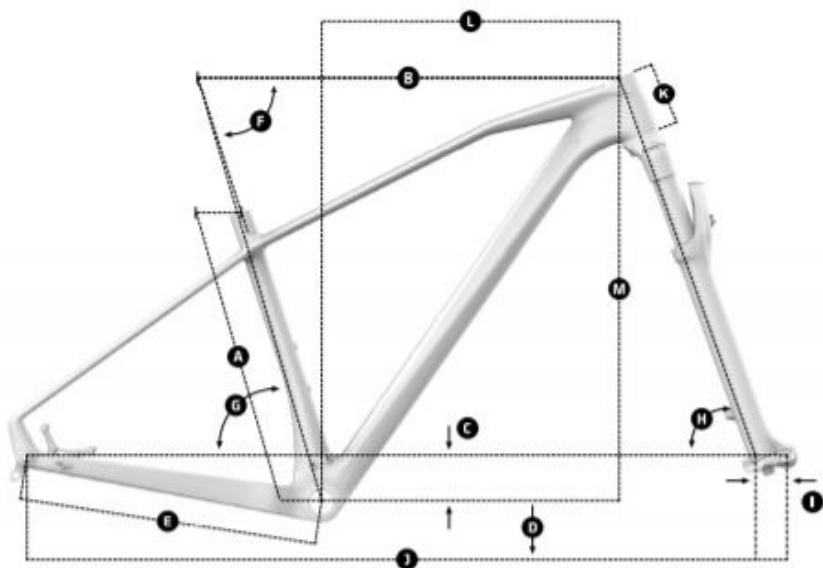

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	72°	72°	72°	72°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1086 mm	1106 mm	1127 mm	1148 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	411 mm	430 mm	447 mm	463 mm
M Stack	605 mm	610 mm	619 mm	632 mm