

# CRAFTY R, BLACK/WHITE, 2021

obj. č: 010.21241

Doporučená cena  
**155.999 Kč**




## Technické specifikace

|                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>barva rámečku</b><br>black/white                                                                                                                                                                                           | <b>vyráběné velikosti</b><br>S 380mm / M 420mm / L 450mm / XL 490mm                                                                                                                                                                                                                                                                                                                                        |
| <b>hmotnost</b><br>24,9 Kg                                                                                                                                                                                                    | <b>rám</b><br>Crafty 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery with integrated alloy cover, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers. |
| <b>vidlice</b><br>Fox 38 29 Float FIT GRIP EVOL Performance, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload | <b>hlavové složení</b><br>Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45                                                                                                                                                                                                                                                              |
| <b>přehazovačka</b><br>Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1                                                                                                                         | <b>řazení</b><br>Sram Trigger NX Eagle, 12s, X-Actuation 1:1, single click                                                                                                                                                                                                                                                                                                                                 |
| <b>brzdové páčky</b><br>Sram G2 R, tool-free reach adjust                                                                                                                                                                     | <b>kliky</b><br>Race Face Aeffect ebike, 165mm                                                                                                                                                                                                                                                                                                                                                             |
| <b>řídítka</b><br>Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL                                                  | <b>představec</b><br>Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbore                                                                                                                                                                                                                                                                                                                             |
| <b>sedlovka</b><br>Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm                                                                                                   | <b>sedlo</b><br>SDG BEL-AIR 3.0, EVA foam, steel rails                                                                                                                                                                                                                                                                                                                                                     |
| <b>náboj přední</b><br>DT 370, Boost 15x110mm, IS 6 bolts                                                                                                                                                                     | <b>náboj zadní</b><br>DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts                                                                                                                                                                                                                                                                                                                                    |
| <b>řetěz</b><br>Sram SX Eagle, 12s, Powerlock                                                                                                                                                                                 | <b>kazeta</b><br>Sram PG-1210, 11-50T, 12s                                                                                                                                                                                                                                                                                                                                                                 |
| <b>dráty</b><br>DT Hybrid SP, straightpull                                                                                                                                                                                    | <b>ráfky</b><br>DT Swiss H1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes                                                                                                                                                                                                                                                                                                 |
| <b>pláště</b><br>Maxxis Minion DHF 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead                                                                                                               | <b>obj.c.</b><br>010.21241                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>tlumič</b><br>Fox Float DPX2 LV EVOL Performance, 205x65mm. Settings: compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings                                           | <b>přední brzda</b><br>Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads                                                                                                                                                                                                                                                                                 |

|                                                                                                                              |                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>zadní brzda</b><br>Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts<br>one-piece rotor, steel-backed organic pads | <b>omotávka</b><br>Maxxis Minion DHR II 29x2.6, tubeless ready, 3C MAXX TERRA,<br>EXO+ Protection, 120TPI, folding bead |
| <b>nastavení tlumiče</b><br>CEC001 compression, Medium rebound, 0.2 volume spacer                                            | <b>převodník</b><br>Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD                                                |
| <b>patka k přehazovačce</b><br>Mondraker M068                                                                                | <b>motor+baterie</b><br>Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch<br>Kiox, Bosch Powertube 625Wh   |

Geometrie

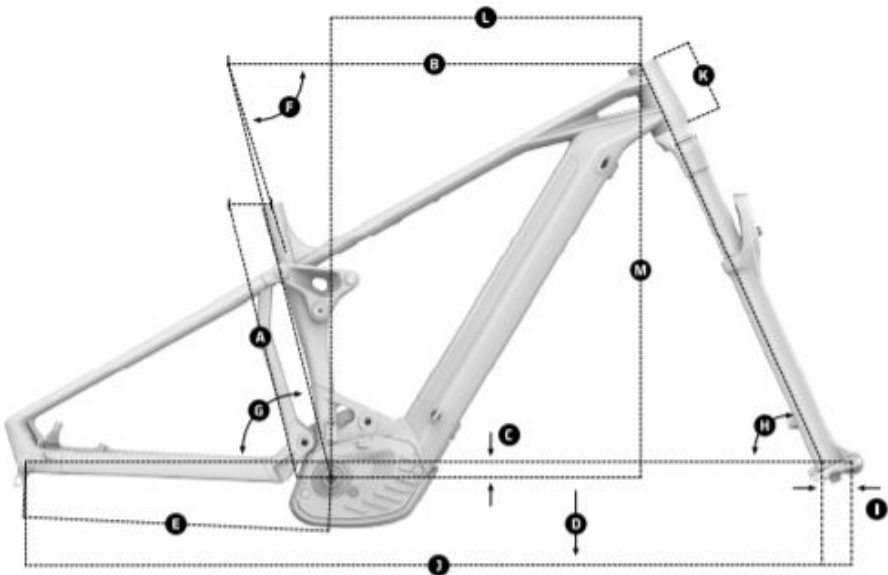

GEOMETRY

| Size                                | S       | M       | L       | XL      |
|-------------------------------------|---------|---------|---------|---------|
| <b>A</b> Seat Tube Length           | 380 mm  | 420 mm  | 450 mm  | 490 mm  |
| <b>B</b> Top Tube Length            | 605 mm  | 625 mm  | 650 mm  | 670 mm  |
| <b>C</b> Bottom Bracket Drop        | -25 mm  | -25 mm  | -25 mm  | -25 mm  |
| <b>D</b> Bottom Bracket Height      | 350 mm  | 350 mm  | 350 mm  | 350 mm  |
| <b>E</b> Chainstay Legth            | 455 mm  | 455 mm  | 455 mm  | 455 mm  |
| <b>F</b> Seat Tube Angle, Actual    | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| <b>G</b> Seat Tube Angle, Effective | 76°     | 76°     | 76°     | 76°     |
| <b>H</b> Head Tube Angle            | 65.5°   | 65.5°   | 65.5°   | 65.5°   |
| <b>I</b> Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| <b>J</b> Wheelbase                  | 1225 mm | 1245 mm | 1265 mm | 1285 mm |
| <b>K</b> Head Tube Length           | 110 mm  | 110 mm  | 130 mm  | 130 mm  |
| <b>L</b> Reach                      | 450 mm  | 470 mm  | 490 mm  | 510 mm  |
| <b>M</b> Stack                      | 622 mm  | 622 mm  | 640 mm  | 640 mm  |