

SUPERFOXY R, SILVER/BLACK/RED, 2021

obj. č.: 010.21097



Doporučená cena

119.599 Kč

Technické specifikace

barva rámečku
silver/black/red

vyráběné velikosti
S 380mm / M 420mm / L 470mm / XL 510mm

hmotnost
15,8 Kg

rám
SuperFoxy 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 160mm travel, Forward Geometry, one piece Monoblock upper link, SuperBoost 12x157mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, Max. capacity sealed bearings, ISCG 05

vidlice
Fox 38 29 Float FIT GRIP EVOL Performance, 170mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

hlavové složení
Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

přehazovačka
Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

řazení
Sram Trigger GX Eagle, 12s, X-Actuation 1:1

brzdové páčky
Sram Code R, tool-free reach adjust

kliky
Truvativ Descendant 7K Eagle, SuperBoost, DUB axle, Direct mount chain ring, S/M size 170mm, L/XL size 175mm

středové složení
Sram DUB BSA, sealed bearings, 73mm

řídítka
Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm

představec

Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm

sedlo

SDG BEL-AIR 3.0, LPU foam, steel rails

náboj přední

DT 370, Boost 15x110mm, IS 6 bolts

náboj zadní

DT 370, SuperBoost 12x157mm, 3 Pawl system, IS 6 bolts, XD freehub

řetěz

Sram NX Eagle, 12s, Powerlock

kazeta

Sram XG-1275, 10-52T, 12s

dráty

DT Champion, straightpull

ráfky

DT Swiss E1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes

pláště

Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead

obj.c.

010.21097

tlumič

Fox Float X2 EVOL Performance, 205x65mm. Settings: Open/Firm, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings

přední brzda

Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

zadní brzda

Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

plášť zadní

Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead

nastavení tlumiče

Medium compression, medium rebound, air volume


převodník

32T, CNC-machined alloy, X-SYNC 2

patka k přehazovačce

Mondraker M068

Geometrie

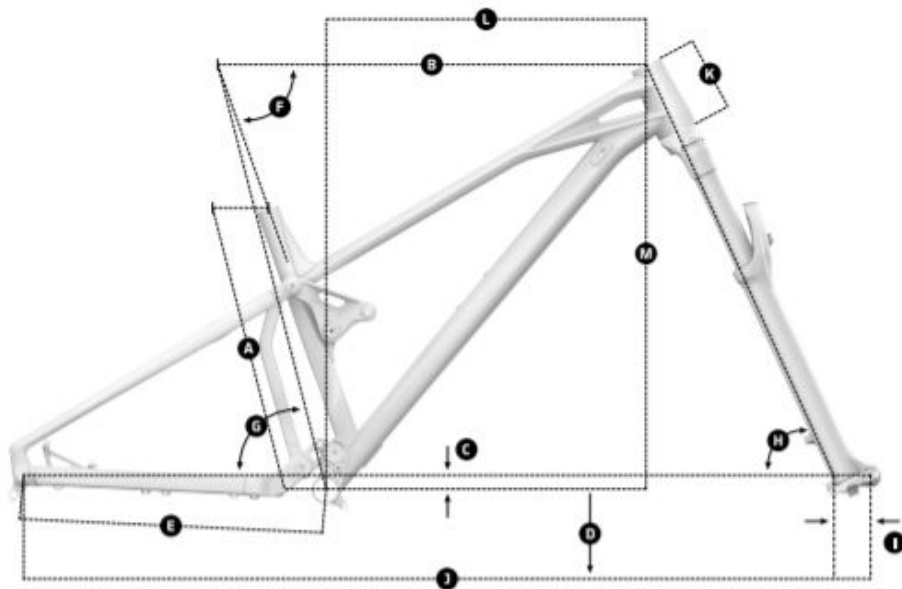

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	470 mm	510 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	445 mm	445 mm	445 mm	445 mm
F Seat Tube Angle, Actual	71°	71°	71°	71°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65°	65°	65°	65°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1224 mm	1245 mm	1273 mm	1293 mm
K Head Tube Length	100 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	621 mm	621 mm	639 mm	639 mm