

# SUMMUM 27,5, BLACK/WHITE/RED, 2021

obj. č.: 010.21121



Doporučená cena

**98.799 Kč**

## Technické specifikace

<b>barva rámečku</b> black/white/red	<b>vyráběné velikosti</b> S 400mm / M 400mm
<b>hmotnost</b> 17,9 Kg	<b>rám</b> Summum 27,5 6061 Alloy Stealth Evo, hydroformed tubing, Zero suspension system, 200mm travel, Forward Geometry, alloy upper link with shock eyelet bearings, SuperBoost 12x157mm rear axle, 83mm BSA bottom bracket, MAX. capacity dual raw Enduro bearings, HHG internal cable routing, ISCG 05. Optional geometry kit: +1 / +2 headset cups
<b>vidlice</b> Rockshox Boxxer Select RC 27'5, 200mm, DebonAir, 1-1/8 steerer tube, Boost 20x110mm axle, offset 46mm. Settings: low-speed compression, rebound, air preload	<b>hlavové složení</b> Onoff Mercurium 1.5 ZS for 1-1/8 steerer tube, 41x30.15x7x45x45 ACB sealed bearings, geometry kit cups, external diameter 56mm
<b>přehazovačka</b> Sram X7, 9s, short cage, X-actuation 1:1	<b>přesmykač</b> E.13 LG1 chain guide, Nickel Chrome protector, height adjustable to appropriate plate size, ISCG 05
<b>řazení</b> Sram trigger X5, 9s, X-actuation 1:1	<b>brzdové páčky</b> Sram Code R, tool-free reach adjust
<b>kličky</b> Race Face Chester, alloy, 165mm	<b>středové složení</b> Race Face BSA, 73mm

**řídítka**

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

**představec**

Onoff Krypton DH CNC Integrated FG, 25-30mm adjustable length, 31.8mm barbore, 6061 alloy, 2x6mm spacer

**sedlovka**

SDG Micro I-Beam SP-751 Alloy, diameter 31.6mm, length 300mm, micro-adjustment

**sedlo**

SDG I-Fly 2.0 I-Beam, high-density PU foam, Cordura sides

**náboj přední**

MDK DA4371B-M20, Boost 20x110mm, IS 6 bolts

**náboj zadní**

MDK DA4352B, 12x157mm, sealed bearings, IS 6 bolts

**řetěz**

Sram PC-951, 9s

**kazeta**

Sram PG-950, 11-26T, 9s

**dráty**

CN stainless steel

**ráfky**

MDK-DP1 27'5, 27mm internal width, 32 holes

**pláště**

Michelin DH34 27'5x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead

**obj.c.**

010.21121

**tlumič**

Fox Van RC Performance, 225x70mm. Settings: low-speed compression, low-speed rebound, spring preload. Trunnion top mount, 30x8mm bottom bushings

**přední brzda**

Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

**zadní brzda**

Sram Code R, oversized 4-piston caliper, Centerline 203mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

**omotávka**

Michelin DH34 27'5x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead

**nastavení tlumiče**

Light compression, light rebound. Spring rate: S size 400 lbs, M size 400 lbs, L size 450 lbs, XL size 500 lbs


**převodník**

36T

**patka k přehazovačce**

Mondraker M068

**Geometrie**

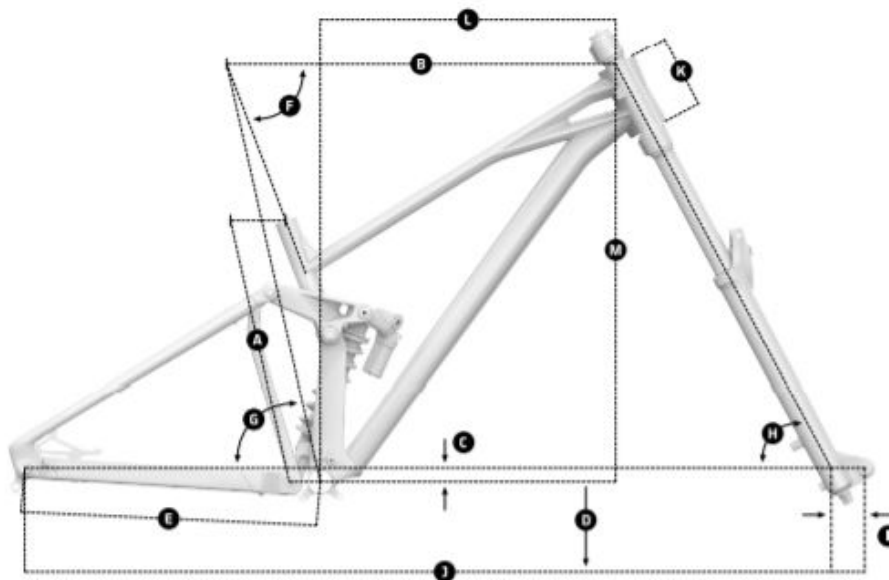

## GEOMETRY

Size	S	M
<b>A</b> Seat Tube Length	400 mm	400 mm
<b>B</b> Top Tube Length	560 mm	580 mm
<b>C</b> Bottom Bracket Drop	0 mm	0 mm
<b>D</b> Bottom Bracket Height	350 mm	350 mm
<b>E</b> Chainstay Legth	450 mm	450 mm
<b>F</b> Seat Tube Angle, Actual	69°	69°
<b>G</b> Seat Tube Angle, Effective	77°	77°
<b>H</b> Head Tube Angle	63°	63°
<b>I</b> Fork Offset	52 mm	52 mm
<b>J</b> Wheelbase	1243 mm	1263 mm
<b>K</b> Head Tube Length	112 mm	112 mm
<b>L</b> Reach	430 mm	450 mm
<b>M</b> Stack	600 mm	600 mm