

# CHASER R, MARLIN BLUE/BLACK, 2022

obj. č.: 010.22170



## Technické specifikace

### vyráběné velikosti

S: 380mm / M: 420mm / L: 450mm / XL: 490mm

### hmotnost

24,6kg

### rám

Chaser 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers, shock mudguard

### vidlice

Fox 36 29 Float FIT GRIP EVOL Rythm, 160mm, e-bike tuned, tapered steerer tube, Boost 15x110mm axle, 44mm offset. Settings: sweep adjust compression, Low-speed rebound, air preload

### hlavové složení

Onoff Saturn tapered for 1-1/8" to 1-1/2" head tube, ACB sealed bearings, top 41x30.2x7x45°x45°, bottom 51.9x40x8x45°x45°

### přehazovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

### řazení

Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click

### brzdové páčky

Sram G2 R, tool-free reach adjust

### kličky

Race Face Aeffect ebike, 165mm

### řídítka

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 800mm, 9° backsweep, 5° upsweep, 31.8mm barbore

### představec

Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore

### sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

### sedlo

FIZIK Terra Aidon X5 145mm

### náboj přední

Mavic, Boost 15x110mm, IS 6 bolts

### náboj zadní

Mavic, Boost 12x148mm, ID360 Ratched system, IS 6 bolts

### řetěz

Sram SX Eagle, 12s, Powerlock

### kazeta

Sram PG-1210, 11-50T, 12s

### dráty

Mavic J-bend duble butted, contactless lacing

### ráfky

Mavic E-Deemax 29, 30mm internal width, welded, PFP, tubeless ready, 28 spokes

### pláště

Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead, Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead

### a151

010.22170

### obj.c.

010.22170

### gripy


Onoff Diamond, 1lock-on, 135mm

### tlumič

Fox Float DPS Performance, 205x65mm. Settings: Compression 3 positions lever, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

|                                                                                                                            |                                                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>přední brzda</b><br>Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads | <b>zadní brzda</b><br>Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads |
| <b>nastavení tlumiče</b><br>Light compression, Light rebound, 1 Token                                                      | <b>převodník</b><br>Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD                                                  |
| <b>patka k přehazovačce</b><br>Mondraker M068                                                                              | <b>motor+baterie</b><br>Bosch Performance Line CX Cruise (25Km/h) GEN4 BS3 , Bosch Powertube 750Wh, Bosch Kiox 300        |

Geometrie

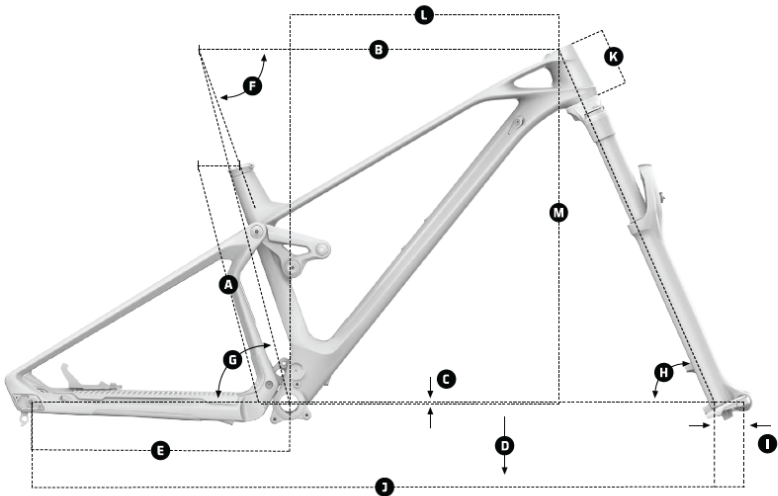

|          |                            |
|----------|----------------------------|
| <b>A</b> | Seat Tube Length           |
| <b>B</b> | Top Tube Length            |
| <b>C</b> | Bottom Bracket Drop        |
| <b>D</b> | Bottom Bracket Height      |
| <b>E</b> | Chainstay Length           |
| <b>F</b> | Seat Tube Angle, Actual    |
| <b>G</b> | Seat Tube Angle, Effective |
| <b>H</b> | Head Tube Angle            |
| <b>I</b> | Fork Offset                |
| <b>J</b> | Wheelbase                  |
| <b>K</b> | Head Tube Length           |
| <b>L</b> | Reach                      |
| <b>M</b> | Stack                      |

e-MTB ENDURO  
CHASER

| Size                                | S       | M       | L       | XL      |
|-------------------------------------|---------|---------|---------|---------|
| <b>A</b> Seat Tube Length           | 380 mm  | 420 mm  | 450 mm  | 490 mm  |
| <b>B</b> Top Tube Length            | 605 mm  | 625 mm  | 650 mm  | 670 mm  |
| <b>C</b> Bottom Bracket Drop        | -25 mm  | -25 mm  | -25 mm  | -25 mm  |
| <b>D</b> Bottom Bracket Height      | 336 mm  | 336 mm  | 336 mm  | 336 mm  |
| <b>E</b> Chainstay Legth            | 455 mm  | 455 mm  | 455 mm  | 455 mm  |
| <b>F</b> Seat Tube Angle, Actual    | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| <b>G</b> Seat Tube Angle, Effective | 76°     | 76°     | 76°     | 76°     |
| <b>H</b> Head Tube Angle            | 65.5°   | 65.5°   | 65.5°   | 65.5°   |
| <b>I</b> Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| <b>J</b> Wheelbase                  | 1225 mm | 1245 mm | 1265 mm | 1285 mm |
| <b>K</b> Head Tube Length           | 110 mm  | 110 mm  | 130 mm  | 130 mm  |
| <b>L</b> Reach                      | 450 mm  | 470 mm  | 490 mm  | 510 mm  |
| <b>M</b> Stack                      | 622 mm  | 622 mm  | 640 mm  | 640 mm  |

## Fotogalerie

---

