

SUPERFOXY CARBON RR, SILVER/CARBON/RED, 2021

obj. č.: 010.21105



Doporučená cena

223.599 Kč

Akční cena

223.599 Kč

Technické specifikace

barva rámečku
silver/carbon/red

vyráběné velikosti
S 380mm / M 420mm / L 470mm / XL 510mm

hmotnost
13,8 Kg

rám
SuperFoxy 29 Stealth Air full Carbon, Zero Suspension System, 160mm travel, Forward Geometry, Carbon Monoblock upper link, SuperBoost 12x157mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors. Geometry kit included: 0° headset cups and chainstay adaptor for 450mm CS length

vidlice
Fox 38 29 Float FIT GRIP2 EVOL Factory Kashima, 170mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high and low-speed compression, high and low-speed rebound, air preload

hlavové složení
Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45

přehazovačka
Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

řazení
Sram Trigger X01 Eagle, 12s, X-Actuation 1:1

brzdové páčky
Sram Code RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust

kliky
Sram X01 Carbon Eagle, SuperBoost, DUB axle, Direct mount chain ring, S/M size 170mm, L/XL size 175mm

středové složení

Sram DUB BSA, sealed bearings, 73mm

řídítka

Onoff Krypton Carbon 0.5, rise: 12,5mm, width: 780mm, 9 backsweep, 5 upsweep, 31,8mm barbore Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

představec

Onoff Krypton FG 30mm, 6061 forged alloy, 31,8mm barbore

sedlovka

Fox Transfer Factory Kashima internal, diameter 31.6mm, S size: 363.5x125mm, M/L size: 418.3x150mm, XL size: 475.1x175mm

sedlo

SDG BEL-AIR 3.0, EVA foam, alloy rails

náboj přední

e thirteen Boost 15x110mm, triple-sealed, fully machined aluminum, IS 6 bolts

náboj zadní

e thirteen Superboost 12x157mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts, XD freehub

řetěz

Sram GX Eagle, 12s, Powerlock

kazeta

Sram XG-1275, 10-52T, 12s

dráty

e thirteen custom Hive triple-buttet black alloy, alloy nipples, nipple washers

ráfky

e thirteen LG1 Plus Enduro, IW30 Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 28 spokes

pláště

Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead

obj.c.

010.21105

tlumič

Öhlins TTX Air 205X65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunion top mount, 22.2x10mm bottom bushings

přední brzda

Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

zadní brzda

Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

plášť zadní

Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead

nastavení tlumiče

C20 compression, R35 rebound


převodník

32T, CNC-machined alloy, X-SYNC 2

patka k přehazovačce

Mondraker M071

Geometrie

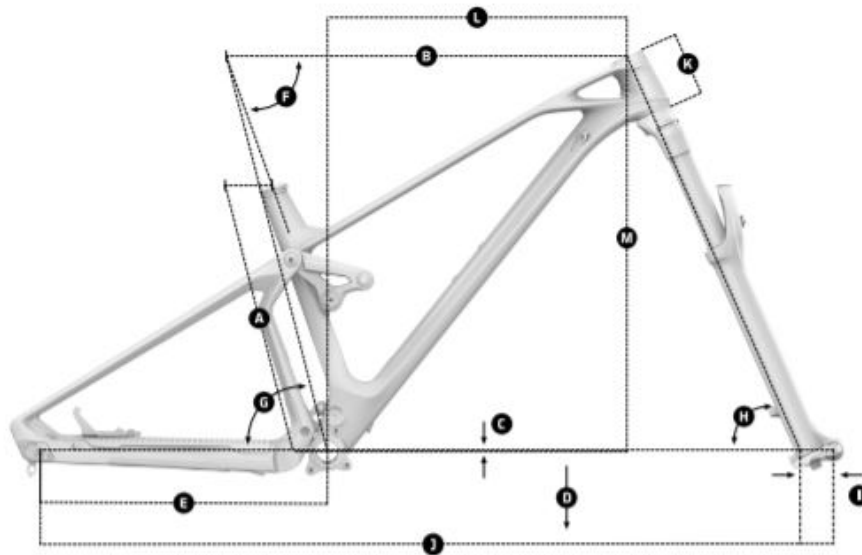

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	470 mm	510 mm
B Top Tube Length	603 mm	626 mm	651 mm	675 mm
C Bottom Bracket Drop	-14 mm	-14 mm	-14 mm	-14 mm
D Bottom Bracket Height	357 mm	357 mm	357 mm	357 mm
E Chainstay Legth	440 - 450 mm	440 - 450 mm	440 - 450 mm	440 - 450 mm
F Seat Tube Angle, Actual	70.5°	70.5°	70.5°	70.5°
G Seat Tube Angle, Effective	75.5°	75.5°	75.5°	75.5°
H Head Tube Angle	65°	65°	65°	65°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1207 mm	1230 mm	1256 mm	1283 mm
K Head Tube Length	90 mm	100 mm	115 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	605 mm	614 mm	628 mm	642 mm