

# SUPERFOXY CARBON RR, SILVER/CARBON/RED, 2021

obj. č.: 010.21105



Doporučená cena

**223.599 Kč**

## Technické specifikace

<b>barva rámečku</b> silver/carbon/red	<b>vyráběné velikosti</b> S 380mm / M 420mm / L 470mm / XL 510mm
<b>hmotnost</b> 13,8 Kg	<b>rám</b> SuperFoxy 29 Stealth Air full Carbon, Zero Suspension System, 160mm travel, Forward Geometry, Carbon Monoblock upper link, SuperBoost 12x157mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors. Geometry kit included: 0° headset cups and chainstay adaptor for 450mm CS length
<b>vidlice</b> Fox 38 29 Float FIT GRIP2 EVOL Factory Kashima, 170mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high and low-speed compression, high and low-speed rebound, air preload	<b>hlavové složení</b> Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45
<b>přehazovačka</b> Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1	<b>řazení</b> Sram Trigger X01 Eagle, 12s, X-Actuation 1:1
<b>brzdové páčky</b> Sram Code RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust	<b>kliky</b> Sram X01 Carbon Eagle, SuperBoost, DUB axle, Direct mount chain ring, S/M size 170mm, L/XL size 175mm
<b>středové složení</b> Sram DUB BSA, sealed bearings, 73mm	<b>řídítka</b> Onoff Krypton Carbon 0.5, rise: 12,5mm, width: 780mm, 9 backsweep, 5 upsweep, 31,8mm barbore Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

**představec**

Onoff Krypton FG 30mm, 6061 forged alloy, 31,8mm barbore

**sedlovka**

Fox Transfer Factory Kashima internal, diameter 31.6mm, S size: 363.5x125mm, M/L size: 418.3x150mm, XL size: 475.1x175mm

**sedlo**

SDG BEL-AIR 3.0, EVA foam, alloy rails

**náboj přední**

e thirteen Boost 15x110mm, triple-sealed, fully machined aluminum, IS 6 bolts

**náboj zadní**

e thirteen Superboost 12x157mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts, XD freehub

**řetěz**

Sram GX Eagle, 12s, Powerlock

**kazeta**

Sram XG-1275, 10-52T, 12s

**dráty**

e thirteen custom Hive triple-buttet black alloy, alloy nipples, nipple washers

**ráfky**

e thirteen LG1 Plus Enduro, IW30 Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 28 spokes

**pláště**

Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead

**obj.c.**

010.21105

**tlumič**

Öhlins TTX Air 205X65mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunion top mount, 22.2x10mm bottom bushings

**přední brzda**

Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

**zadní brzda**

Sram Code RSC, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

**omotávka**

Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead

**nastavení tlumiče**

C20 compression, R35 rebound


**převodník**

32T, CNC-machined alloy, X-SYNC 2

**patka k přehazovačce**

Mondraker M071

**Geometrie**

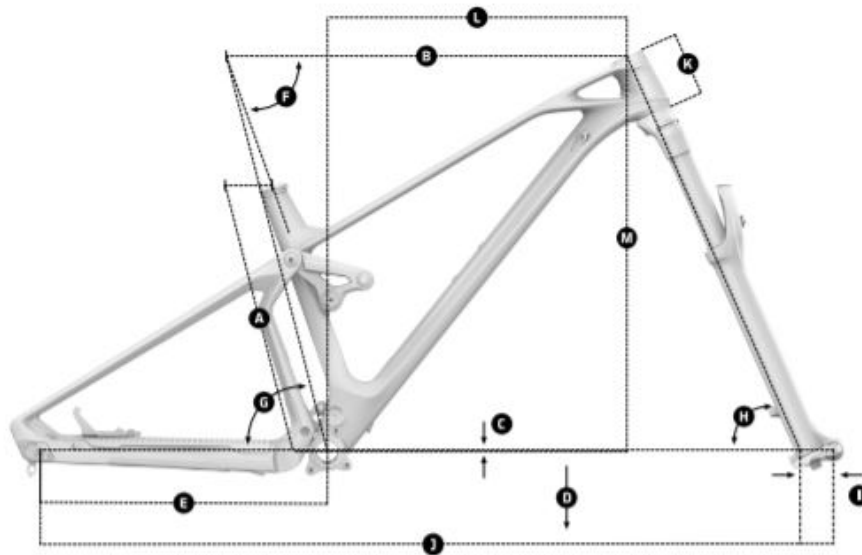

## GEOMETRY

Size	S	M	L	XL
<b>A</b> Seat Tube Length	380 mm	420 mm	470 mm	510 mm
<b>B</b> Top Tube Length	603 mm	626 mm	651 mm	675 mm
<b>C</b> Bottom Bracket Drop	-14 mm	-14 mm	-14 mm	-14 mm
<b>D</b> Bottom Bracket Height	357 mm	357 mm	357 mm	357 mm
<b>E</b> Chainstay Legth	440 - 450 mm	440 - 450 mm	440 - 450 mm	440 - 450 mm
<b>F</b> Seat Tube Angle, Actual	70.5°	70.5°	70.5°	70.5°
<b>G</b> Seat Tube Angle, Effective	75.5°	75.5°	75.5°	75.5°
<b>H</b> Head Tube Angle	65°	65°	65°	65°
<b>I</b> Fork Offset	44 mm	44 mm	44 mm	44 mm
<b>J</b> Wheelbase	1207 mm	1230 mm	1256 mm	1283 mm
<b>K</b> Head Tube Length	90 mm	100 mm	115 mm	130 mm
<b>L</b> Reach	450 mm	470 mm	490 mm	510 mm
<b>M</b> Stack	605 mm	614 mm	628 mm	642 mm