

# SUMMUM RR 29, SILVER/BLACK/RED/BLUE, 2021

obj. č.: 010.21117



Doporučená cena

**181.999 Kč**

## Technické specifikace

### barva rámečku

silver/black/red/blue

### vyráběné velikosti

S 400mm / M 400mm / L 400mm / XL 400mm

### hmotnost

17,4 Kg

### rám

Summum 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero suspension system, 200mm travel, Forward Geometry, alloy upper link with shock eyelet bearings, SuperBoost 12x157mm rear axle, 83mm BSA bottom bracket, MAX. capacity dual raw Enduro bearings, HHG internal cable routing, ISCG 05. Geometry kit included: +1 / +2 headset cups

### vidlice

Fox 40 29 Float FIT GRIP2 EVOL Factory Kashima, 203mm, air spring, 1-1/8" steerer tube, 20x110mm axle, offset 56mm. Settings: high and low-speed compression, high and low-speed rebound, air preload

### hlavové složení

Onoff Mercurium 1.5 ZS for 1-1/8 steerer tube, 41x30.15x7x45x45 ACB sealed bearings, geometry kit cups, external diameter 56mm

### přehazovačka

Shimano Saint RD-M820-SS, 10s, Shadow+, short cage

### přesmykač

E.13 LG1+ Race Carbon chain guide, IFD DMB (Direct mount Bashguard) Gen 2 Stealth Idler, Aluminum hardware, adjustable/replaceable lower armature, polycarbonate, ISCG 05, adjustable upper slider

### řazení

Shimano Saint SL-M820 10s, low friction multi bearing, instant release, multi release, 2-way release

### brzdové páčky

Shimano Saint, ergonomic antiskid lever with servo wave, free stroke and tool less reach adjust

**kliky**

Shimano Saint M825 Hollowtech II, reinforced steel axle, 165mm

**středové složení**

Shimano 83mm

**řídítka**

Renthal Fatbar series 7 alloy, rise: 30mm, width: 780mm, 7 backsweep, 5 upsweep, 31.8mm barbore Renthal, double lock-on, kevlar compound, 130mm

**představec**

Onoff Krypton DH CNC Integrated FG, 25-30mm adjustable length, 31.8mm barbore, 6061 alloy, 2x6mm spacer

**sedlovka**

SDG Micro I-Beam SP-951 Carbon, diameter 31.6mm, length 300mm, micro-adjustment

**sedlo**

SDG I-Fly 2.0 I-Beam, high-density PU foam, Cordura sides

**náboj přední**

e thirteen Boost 20x110mm, triple-sealed, fully machined aluminum, IS 6 bolts

**náboj zadní**

e thirteen Superboost 12x157mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts

**řetěz**

Shimano HG95, 10s

**kazeta**

Shimano CS-HG500-10, 11-25T, 10s

**dráty**

e thirteen custom Hive triple-buttet black alloy, alloy nipples, nipple washers

**ráfky**

e thirteen LG1 Plus DH, IW29 Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 32 spokes

**pláště**

Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead

**obj.c.**

010.21117

**tlumič**

Fox DHX2 Factory Kashima, 225x70mm. Settings: high and low-speed compression, high and low-speed rebound, spring preload. Super light steel (SLS) spring. Trunnion top mount, 30x8mm bottom bushings

**přední brzda**

Shimano Saint M820, 4-piston caliper, RT86 203mm 2-piece IS 6 bolts rotor with ICE technology, resin pads with cooler

**zadní brzda**

Shimano Saint M820, 4-piston caliper, RT86 203mm 2-piece IS 6 bolts rotor with ICE technology, resin pads with cooler

**omotávka**

Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead

**nastavení tlumiče**

ECC010 compression, ECR012 rebound. Spring rate: S size 400 lbs, M size 450 lbs, L/XL size 500 lbs


**převodník**

36T, aluminum, BCD 104

**patka k přehazovače**

Mondraker M068

**Geometrie**

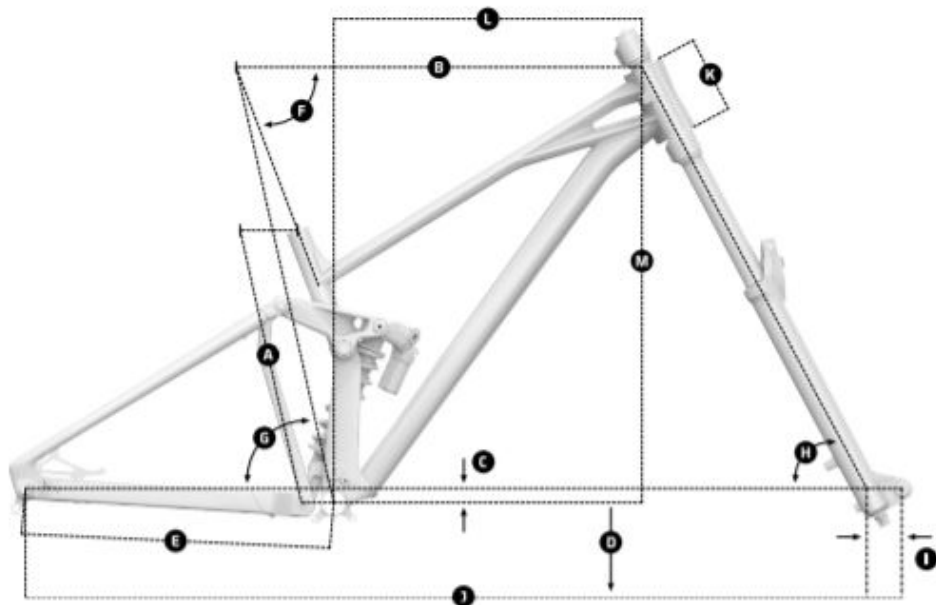

## GEOMETRY

Size	S	M	L	XL
<b>A</b> Seat Tube Length	400 mm	400 mm	400 mm	400 mm
<b>B</b> Top Tube Length	573 mm	593 mm	618 mm	643 mm
<b>C</b> Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20 mm
<b>D</b> Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
<b>E</b> Chainstay Length	450 mm	450 mm	450 mm	450 mm
<b>F</b> Seat Tube Angle, Actual	69°	69°	69°	69°
<b>G</b> Seat Tube Angle, Effective	77°	77°	77°	77°
<b>H</b> Head Tube Angle	63.5°	63.5°	63.5°	63.5°
<b>I</b> Fork Offset	58 mm	58 mm	58 mm	58 mm
<b>J</b> Wheelbase	1260 mm	1270 mm	1295 mm	1320 mm
<b>K</b> Head Tube Length	112 mm	112 mm	112 mm	112 mm
<b>L</b> Reach	430 mm	450 mm	475 mm	500 mm
<b>M</b> Stack	632 mm	632 mm	632 mm	632 mm