

SUMMUM RR 29, SILVER/BLACK/RED/BLUE, 2021

obj. č.: 010.21117



Doporučená cena

181.999 Kč

Technické specifikace

barva rámečku

silver/black/red/blue

vyráběné velikosti

S 400mm / M 400mm / L 400mm / XL 400mm

hmotnost

17,4 Kg

rám

Summum 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero suspension system, 200mm travel, Forward Geometry, alloy upper link with shock eyelet bearings, SuperBoost 12x157mm rear axle, 83mm BSA bottom bracket, MAX. capacity dual raw Enduro bearings, HHG internal cable routing, ISCG 05. Geometry kit included: +-1 / +-2 headset cups

vidlice

Fox 40 29 Float FIT GRIP2 EVOL Factory Kashima, 203mm, air spring, 1-1/8" steerer tube, 20x110mm axle, offset 56mm. Settings: high and low-speed compression, high and low-speed rebound, air preload

hlavové složení

Onoff Mercurium 1.5 ZS for 1-1/8 steerer tube, 41x30.15x7x45x45 ACB sealed bearings, geometry kit cups, external diameter 56mm

přehazovačka

Shimano Saint RD-M820-SS, 10s, Shadow+, short cage

přesmykač

E.13 LG1+ Race Carbon chain guide, IFD DMB (Direct mount Bashguard) Gen 2 Stealth Idler, Aluminum hardware, adjustable/replaceable lower armature, polycarbonate, ISCG 05, adjustable upper slider

řazení

Shimano Saint SL-M820 10s, low friction multi bearing, instant release, multi release, 2-way release

brzdové páčky

Shimano Saint, ergonomic antiskid lever with servo wave, free stroke and tool less reach adjust

kliky

Shimano Saint M825 Hollowtech II, reinforced steel axle, 165mm

středové složení

Shimano 83mm

řídítka

Renthal Fatbar series 7 alloy, rise: 30mm, width: 780mm, 7 backsweep, 5 upsweep, 31.8mm barbore Renthal, double lock-on, kevlar compound, 130mm

představec

Onoff Krypton DH CNC Integrated FG, 25-30mm adjustable length, 31.8mm barbore, 6061 alloy, 2x6mm spacer

sedlovka

SDG Micro I-Beam SP-951 Carbon, diameter 31.6mm, length 300mm, micro-adjustment

sedlo

SDG I-Fly 2.0 I-Beam, high-density PU foam, Cordura sides

náboj přední

e thirteen Boost 20x110mm, triple-sealed, fully machined aluminum, IS 6 bolts

náboj zadní

e thirteen Superboost 12x157mm, triple-sealed, fully machined aluminum w/6-degree engagement, IS 6 bolts

řetěz

Shimano HG95, 10s

kazeta

Shimano CS-HG500-10, 11-25T, 10s

dráty

e thirteen custom Hive triple-buttet black alloy, alloy nipples, nipple washers

ráfky

e thirteen LG1 Plus DH, IW29 Hookless, 6069 Welded Aluminum, 30mm internal width, tubeless ready, 32 spokes

pláště

Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead

obj.c.

010.21117

tlumič

Fox DHX2 Factory Kashima, 225x70mm. Settings: high and low-speed compression, high and low-speed rebound, spring preload. Super light steel (SLS) spring. Trunnion top mount, 30x8mm bottom bushings

přední brzda

Shimano Saint M820, 4-piston caliper, RT86 203mm 2-piece IS 6 bolts rotor with ICE technology, resin pads with cooler

zadní brzda

Shimano Saint M820, 4-piston caliper, RT86 203mm 2-piece IS 6 bolts rotor with ICE technology, resin pads with cooler

plášť zadní

Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead

nastavení tlumiče

ECC010 compression, ECR012 rebound. Spring rate: S size 400 lbs, M size 450 lbs, L/XL size 500 lbs


převodník

36T, aluminum, BCD 104

patka k přehazovačce

Mondraker M068

Geometrie

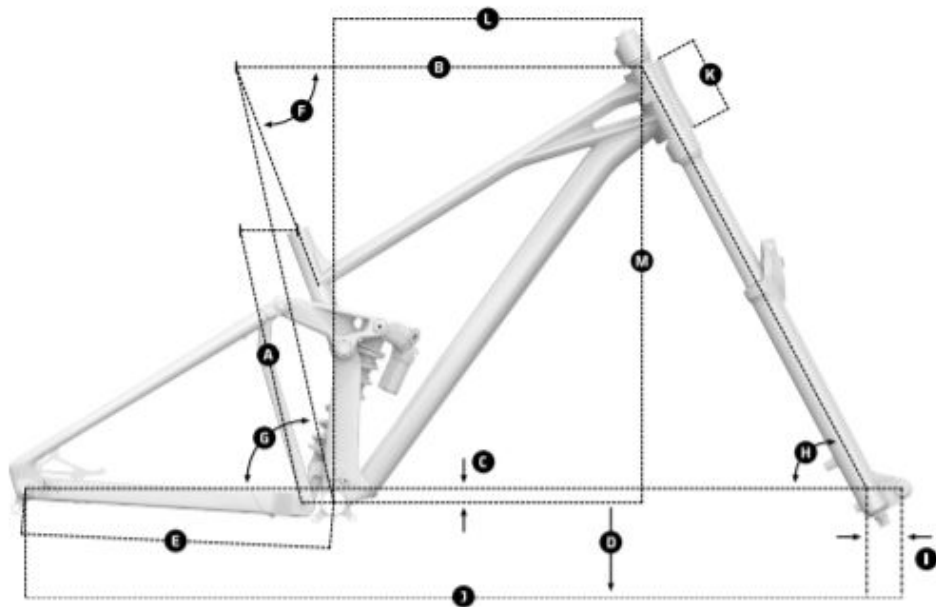

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	400 mm	400 mm	400 mm	400 mm
B Top Tube Length	573 mm	593 mm	618 mm	643 mm
C Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	450 mm	450 mm	450 mm	450 mm
F Seat Tube Angle, Actual	69°	69°	69°	69°
G Seat Tube Angle, Effective	77°	77°	77°	77°
H Head Tube Angle	63.5°	63.5°	63.5°	63.5°
I Fork Offset	58 mm	58 mm	58 mm	58 mm
J Wheelbase	1260 mm	1270 mm	1295 mm	1320 mm
K Head Tube Length	112 mm	112 mm	112 mm	112 mm
L Reach	430 mm	450 mm	475 mm	500 mm
M Stack	632 mm	632 mm	632 mm	632 mm