

PRIME, BLACK/WHITE, 2021

obj. č: 010.21206

Doporučená cena

90.999 Kč

Akční cena

86.999 Kč



Technické specifikace

barva rámečku black/white	vyráběné velikosti XS 380mm / S 390mm / M 430mm / L 470mm / XL 510mm
hmotnost 21,9 Kg	rám Prime Xtralite 6061 Full Butted Alloy, Forward Geometry, internal removable battery, tapered head tube, Boost 12x148mm rear axle, integrated dropout speed sensor
vidlice RockShox Recon Silver RL 29, 120mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 42mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload	hlavové složení Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45
přehazovačka Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1	řazení Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click
brzdové páčky Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings	kliky Race Face Aeffect ebike, 165mm
řídítka Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm	představec Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbore
sedlovka Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm	sedlo Mondraker e-MTB custom design
náboj přední Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts	náboj zadní Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts
řetěz Sram SX Eagle, 12s, Powerlock	kazeta Sram PG-1210, 11-50T, 12s
dráty CN round stainless steel	ráfky MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes
pláště Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead	obj.c. 010.21206
přední brzda Sram Level T, 2 piece caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pad	zadní brzda Sram Level T, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad


omotávka
Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead

patka k přehazovačce
Mondraker M068

převodník
Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD

motor+baterie
Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Purion, Bosch Powertube 625Wh

Geometrie

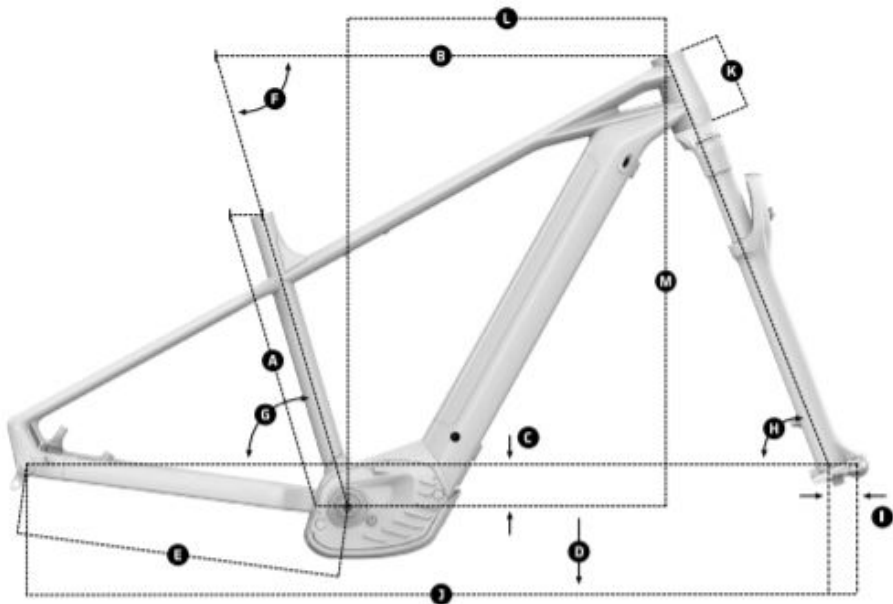

GEOMETRY

Size	XS	S	M	L	XL
A Seat Tube Length	380 mm	390 mm	430 mm	470 mm	510 mm
B Top Tube Length	600 mm	615 mm	645 mm	670 mm	700 mm
C Bottom Bracket Drop	-60 mm	-60 mm	-60 mm	-60 mm	-60 mm
D Bottom Bracket Height	318 mm	318 mm	318 mm	318 mm	318 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	69°	69°	69°	69°	69°
I Fork Offset	51 mm	51 mm	51 mm	51 mm	51 mm
J Wheelbase	1138mm	1153 mm	1183 mm	1210 mm	1240 mm
K Head Tube Length	110 mm	110 mm	110 mm	130 mm	130 mm
L Reach	410 mm	425 mm	455 mm	480 mm	505 mm
M Stack	640 mm	640 mm	640 mm	658 mm	658 mm