

CRAFTY CARBON RR SL, CARBON/BLACK/SILVER, 2021

obj. č: 010.21267



Doporučená cena

337.999 Kč

Technické specifikace

barva rámečku carbon/black/silver	vyráběné velikosti S 380mm / M 420mm / L 450mm / XL 490mm
hmotnost 20,1 Kg	rám Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.
vidlice Fox 36 29 Float FIT4 EVOL Factory Kashima, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload	hlavové složení Acros custom for 1-1/2 head tube, angular contact bearings 40x52x7, Internal cable routing
přehazovačka Sram X01 Eagle AXS, Type 2.1 roller bearing clutch, cage lock, long carbon cage, 1x12s, X-actuation 1:1	řazení Sram Eagle AXS, 12s
brzdové páčky Shimano XTR M9120, ergonomic antiskid lever with servo wave, tool less reach adjust, free stroke adjust	kliky E.13 TRS Race carbon ebike, 165mm
řídítka Onoff Krypton Carbon 1.0, rise: 25mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore, Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL	představec Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbore
sedlovka RockShox Reverb Stealth AXS, diameter 31.6mm, S size: 390x125mm, M size: 440x150mm, L/XL size: 440x170mm	sedlo FIZIK ANTARES LARGE R1
náboj přední DT 240, Boost 15x110mm, CenterLock	náboj zadní DT 240, Boost 12x148mm, 24T Ratchet system, CenterLock
řetěz Sram GX Eagle, 12s, Powerlock	kazeta Sram XG-1295, 10-50T, 12s
dráty DT Hybrid SP, straightpull	ráfky DT Swiss HXC1200 Carbon Spline 29, 30mm internal width, hookless, tubeless ready, 28 spokes

obj.c.
010.21267

přední brzda
Shimano XTR M9120, 4 piston caliper, MT900 ICE-Tech 203mm CenterLock rotor, resin pads with fin

omotávka
Maxxis Rekon 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

převodník
Sram X-Sync 2 Eagle 34T, alloy, narrow-wide, 104 BCD

motor+baterie
Bosch Performance Line CX Cruise (25Km/h) GEN4, computer
Bosch Kiox, Bosch Powertube 625Wh


tlumič
Fox Float DPS Factory Kashima, 205x65mm. Settings:
Compression 3 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

zadní brzda
Shimano XTR M9120, 4 piston caliper, MT910 ICE-Tech 203mm CenterLock rotor, resin pads with fin

nastavení tlumiče
Medium compression, Medium rebound, 0.4 volume spacer

patka k přehazovačce
Mondraker M068

Geometrie

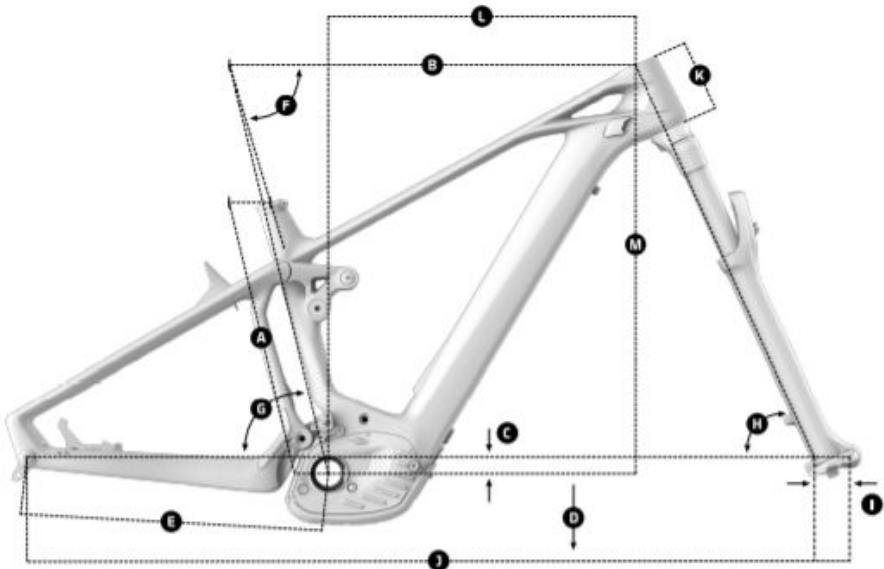

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	480 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73. 5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1270 mm	1290 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm