

CRAFTY CARBON RR SL, CARBON/BLACK/SILVER, 2021

obj. č: 010.21267



Doporučená cena

337.999 Kč

Technické specifikace

barva rámečku

carbon/black/silver

vyráběné velikosti

S 380mm / M 420mm / L 450mm / XL 490mm

hmotnost

20,1 Kg

rám

Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

vidlice

Fox 36 29 Float FIT4 EVOL Factory Kashima, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

hlavové složení

Acros custom for 1-1/2 head tube, angular contact bearings 40x52x7, Internal cable routing

přehazovačka

Sram X01 Eagle AXS, Type 2.1 roller bearing clutch, cage lock, long carbon cage, 1x12s, X-actuation 1:1

řazení

Sram Eagle AXS, 12s

brzdové páčky

Shimano XTR M9120, ergonomic antiskid lever with servo wave, tool less reach adjust, free stroke adjust

kliky

E.13 TRS Race carbon ebike, 165mm

řídítka

Onoff Krypton Carbon 1.0, rise: 25mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore, Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

představec

Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbore

sedlovka

RockShox Reverb Stealth AXS, diameter 31.6mm, S size: 390x125mm, M size: 440x150mm, L/XL size: 440x170mm

sedlo

FIZIK ANTARES LARGE R1

náboj přední

DT 240, Boost 15x110mm, CenterLock

náboj zadní

DT 240, Boost 12x148mm, 24T Ratchet system, CenterLock

řetěz

Sram GX Eagle, 12s, Powerlock

kazeta

Sram XG-1295, 10-50T, 12s

dráty

DT Hybrid SP, straightpull

ráfky

DT Swiss HXC1200 Carbon Spline 29, 30mm internal width, hookless, tubeless ready, 28 spokes

obj.c.
010.21267

přední brzda
Shimano XTR M9120, 4 piston caliper, MT900 ICE-Tech 203mm CenterLock rotor, resin pads with fin

omotávka
Maxxis Rekon 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

převodník
Sram X-Sync 2 Eagle 34T, alloy, narrow-wide, 104 BCD

motor+baterie
Bosch Performance Line CX Cruise (25Km/h) GEN4, computer
Bosch Kiox, Bosch Powertube 625Wh


tlumič
Fox Float DPS Factory Kashima, 205x65mm. Settings:
Compression 3 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

zadní brzda
Shimano XTR M9120, 4 piston caliper, MT910 ICE-Tech 203mm CenterLock rotor, resin pads with fin

nastavení tlumiče
Medium compression, Medium rebound, 0.4 volume spacer

patka k přehazovačce
Mondraker M068

Geometrie

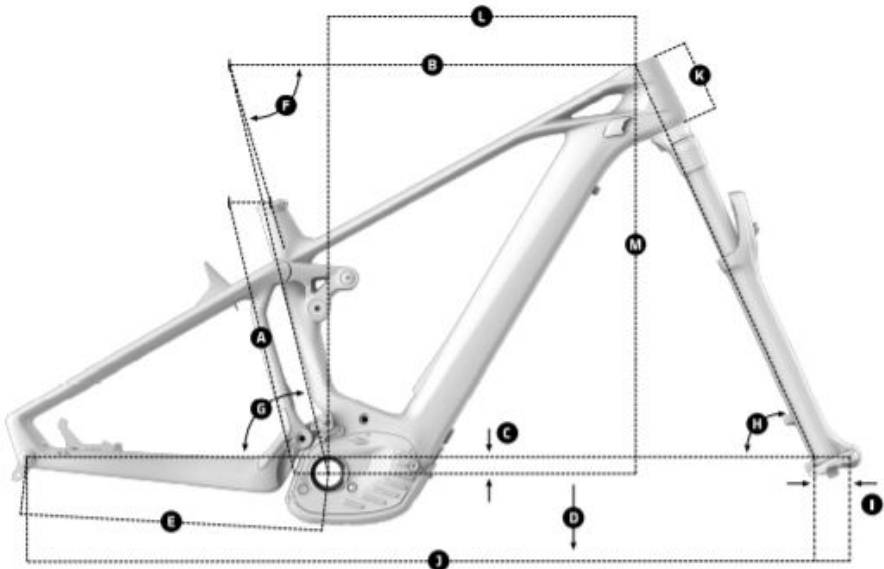

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	480 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73. 5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1270 mm	1290 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm