

# SUMMUM 29, BLACK/WHITE/RED, 2021

obj. č.: 010.21109



Doporučená cena

**98.799 Kč**

## Technické specifikace

<b>barva rámečku</b> black/white/red	<b>vyráběné velikosti</b> S 400mm / M 400mm / L 400mm / XL 400mm
<b>hmotnost</b> 17,9 Kg	<b>rám</b> Summum 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero suspension system, 200mm travel, Forward Geometry, alloy upper link with shock eyelet bearings, SuperBoost 12x157mm rear axle, 83mm BSA bottom bracket, MAX. capacity dual raw Enduro bearings, HHG internal cable routing, ISCG 05. Optional geometry kit: +-1 / +-2 headset cups
<b>vidlice</b> Rockshox Boxxer Select RC 29, 200mm, DebonAir, 1-1/8 steerer tube, Boost 20x110mm axle, offset 56mm. Settings: low-speed compression, rebound, air preload	<b>hlavové složení</b> Onoff Mercurium 1.5 ZS for 1-1/8 steerer tube, 41x30.15x7x45x45 ACB sealed bearings, geometry kit cups, external diameter 56mm
<b>přehazovačka</b> Sram X7, 9s, short cage, X-actuation 1:1	<b>přesmykač</b> E.13 LG1 chain guide + DMB (Direct mount Bashguard) Gen 2 Stealth Idler, Aluminum hardware, adjustable/replaceable lower armature, polycarbonate, ISCG 05, adjustable upper slider
<b>řazení</b> Sram trigger X5, 9s, X-actuation 1:1	<b>brzdové páčky</b> Sram Code R, tool-free reach adjust
<b>kličky</b> Race Face Chester, alloy, 165mm	<b>středové složení</b> Race Face BSA, 73mm

**řídítka**

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

**představec**

Onoff Krypton DH CNC Integrated FG, 25-30mm adjustable length, 31.8mm barbore, 6061 alloy, 2x6mm spacer

**sedlovka**

SDG Micro I-Beam SP-751 Alloy, diameter 31.6mm, length 300mm, micro-adjustment

**sedlo**

SDG I-Fly 2.0 I-Beam, high-density PU foam, Cordura sides

**náboj přední**

MDK DA4371B-M20, Boost 20x110mm, IS 6 bolts

**náboj zadní**

MDK DA4352B, 12x157mm, sealed bearings, IS 6 bolts

**řetěz**

Sram PC-951, 9s

**kazeta**

Sram PG-950, 11-26T, 9s

**dráty**

CN stainless steel

**ráfky**

MDK-DP1 29, 27mm internal width, 32 holes

**pláště**

Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead

**obj.c.**

010.21109

**tlumič**

Fox Van RC Performance, 225x70mm. Settings: low-speed compression, low-speed rebound, spring preload. Trunnion top mount, 30x8mm bottom bushings

**přední brzda**

Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

**zadní brzda**

Sram Code R, oversized 4-piston caliper, Centerline 203mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

**plášť zadní**

Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead

**nastavení tlumiče**

Light compression, light rebound. Spring rate: S size 400 lbs, M size 400 lbs, L size 450 lbs, XL size 500 lbs


**převodník**

36T

**patka k přehazovačce**

Mondraker M068

**Geometrie**

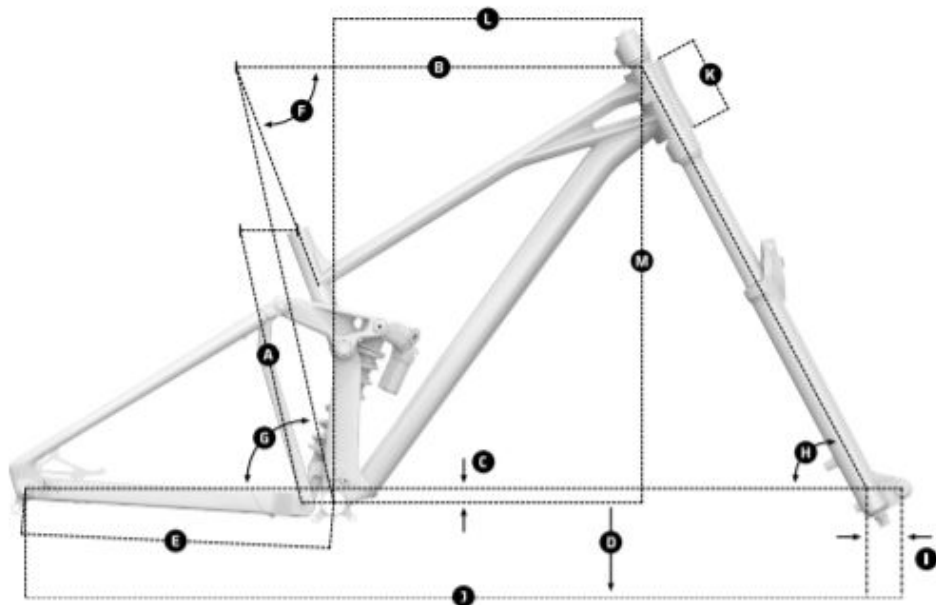

## GEOMETRY

Size	S	M	L	XL
<b>A</b> Seat Tube Length	400 mm	400 mm	400 mm	400 mm
<b>B</b> Top Tube Length	573 mm	593 mm	618 mm	643 mm
<b>C</b> Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20 mm
<b>D</b> Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
<b>E</b> Chainstay Length	450 mm	450 mm	450 mm	450 mm
<b>F</b> Seat Tube Angle, Actual	69°	69°	69°	69°
<b>G</b> Seat Tube Angle, Effective	77°	77°	77°	77°
<b>H</b> Head Tube Angle	63.5°	63.5°	63.5°	63.5°
<b>I</b> Fork Offset	58 mm	58 mm	58 mm	58 mm
<b>J</b> Wheelbase	1260 mm	1270 mm	1295 mm	1320 mm
<b>K</b> Head Tube Length	112 mm	112 mm	112 mm	112 mm
<b>L</b> Reach	430 mm	450 mm	475 mm	500 mm
<b>M</b> Stack	632 mm	632 mm	632 mm	632 mm