

PODIUM CARBON RR SL, CARBON/BLEU/BLEU, 2021

obj. č.: 010.21033

Doporučená cena

233.999 Kč

Akční cena

233.999 Kč



Technické specifikace

barva rámečku carbon/blue/blue	vyráběné velikosti S 390mm / M 420mm / L 470mm / XL 510mm
hmotnost 7,8 Kg	rám Podium 29 Stealth Air Carbon, XC Forward Geometry, BSA bottom bracket, tapered head tube, HHG internal cable routing, Boost 12x148mm rear axle, dedicated 1X drivetrain design, Flatmount brake compatible,
vidlice Rockshox SID SL Ultimate RL 29, 100mm, Charger Race day, Debonair, tapered steerer tube, Boost 15x110mm axle, 32mm aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload	hlavové složení Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45
přehazovačka Sram XX1 Eagle AXS, Type 2.1 roller bearing clutch, cage lock, long carbon cage, 1x12s, X-actuation 1:1	řazení Sram Eagle AXS, 12s
brzdové páčky Sram Level Ultimate, carbon lever, Direct Link actuation, tooled reach adjust, lever pivot bearings, titanium hardware	kliky Sram XX1 Eagle, Boost, DUB axle, Direct mount chain ring, S size: 170mm, M/L/XL size: 175mm
středové složení Sram DUB BSA, sealed bearings, 73mm	řídítka Onoff Helium Carbon 0.2, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbore LIZARD DSP 30.3
představec Onoff Helium 7075 alloy CNC, 31.8mm barbore, rise: +/-5, length: sizes S/M: 60mm, size L: 70mm, size XL: 80mm	sedlovka Onoff Helium Carbon 0-R VFLEX, diameter 27.2mm, length 400mm
sedlo Fizik Antares R7	náboj přední Mavic Boost 15x110mm, IS 6 bolts
náboj zadní Mavic Boost 12x148mm, 24T Ratchet system, IS 6 bolts, XD freehub	řetěz Sram XX1 Eagle, 12s, Powerlock
kazeta Sram XG1299 10-50T, 12s	dráty Mavic ultralight, bladed, straightpull
ráfky Mavic Crossmax SL Ultimate Carbon 29, 25mm internal width, hookless, UST tubeless, 28 spokes	pláště Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead
obj.c. 010.21033	přední brzda Sram Level Ultimate, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad, titanium hardware


zadní brzda
Sram Level Ultimate, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad, titanium hardware

převodník
34T, CNC-machined alloy, X-SYNC 2

omotávka
Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead

patka k přehazovačce
Sram UDH

Geometrie

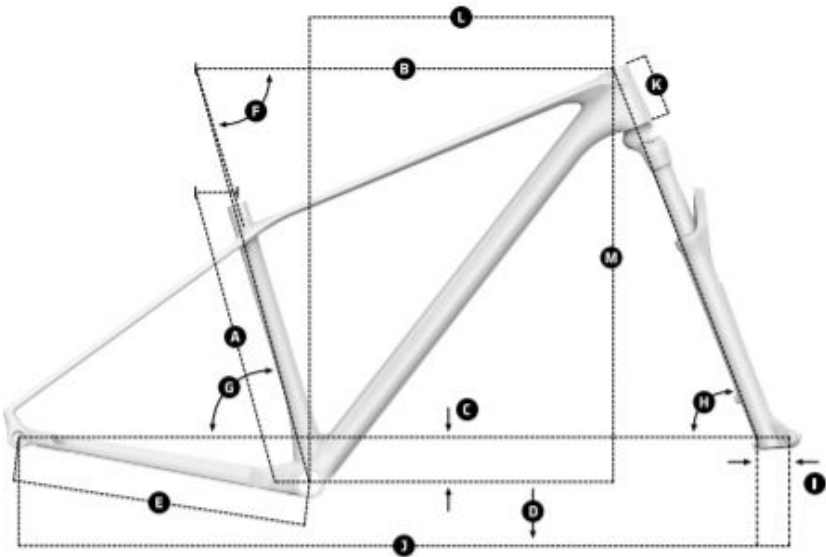

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	390 mm	420 mm	470 mm	510 mm
B Top Tube Length	590 mm	611mm	632 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	430 mm	430 mm	430 mm	430 mm
F Seat Tube Angle, Actual	73°	73°	73°	73°
G Seat Tube Angle, Effective	74.5°	74.5°	74.5°	74.5°
H Head Tube Angle	68.5°	68.5°	68.5°	68.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1107 mm	1128 mm	1150 mm	1170 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	425 mm	444 mm	463 mm	477 mm
M Stack	598 mm	602 mm	611 mm	625 mm