

F-PODIUM DC CARBON, BLUE/WHITE/ORANGE, 2021

obj. č.: 010.21049



Technické specifikace

barva rámečku

blue/white/orange

vyráběné velikosti

S 390mm / M 420mm / L 470mm / XL 510mm

hmotnost

12,4 Kg

rám

F-Podium 29 Stealth Air Full Carbon, XCO Optimized Zero Suspension System, 100mm, XC Forward Geometry, Carbon Monoblock upper link, BSA bottom bracket, tapered head tube, HHG internal cable routing, dedicated 1X drivetrain design, Boost 12x148mm rear axle, shock mudguard, postmount rear brake mount.

vidlice

Rockshox SID Select RL 29, 120mm, Charger, Debonair, tapered steerer tube, Boost 15x110mm axle, 35mm tapered aluminum stanchions, offset 44mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload

hlavové složení

Acros AZX-239 R1 Block Lock, ZS44/28.6 top, ZS56/40 bottom

přehazovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

řazení

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram Level T, Direct Link actuation, tooled reach adjust, lever pivot bushings

kliky

Truvativ Stylo 6K Eagle, 12s, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm

středové složení

Sram DUB BSA, sealed bearings, 73mm

řídítka

Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 760mm, 9 backsweep, 0 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm

představec

MDK, 6061 T6 Alloy, 31.8mm barbore, rise: +/-5, length: sizes S/M: 50mm, size L: 60mm, size XL: 70mm

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M/L/XL size 387x125mm

sedlo

Fizik Antares R7

náboj přední

DT 370, Boost 15x110mm, IS 6 bolts

náboj zadní
DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts

řetěz
Sram SX Eagle, 12s, Powerlock

kazeta
Sram PG-1230, 11-50T, 12s

dráty
DT Champion, straightpull

ráfky
DT Swiss X1900 Spline 29, 25mm internal width, sleeved aluminum, tubeless ready, 28 spokes

pláště
Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead

obj.c.
010.21049

tlumič
Rockshox SID Select+ RLR Debonair, 185x47.5mm. Settings: OneLock 2 position remote compression (open/lock), low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings

přední brzda
Sram Level T, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad

zadní brzda
Sram Level T, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad


plášť zadní
Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead

nastavení tlumiče
Light compression, medium rebound, Lockout 430, 1 Token

převodník
34T, steel, X-Sync 2

patka k přehazovačce
Sram UDH

Geometrie

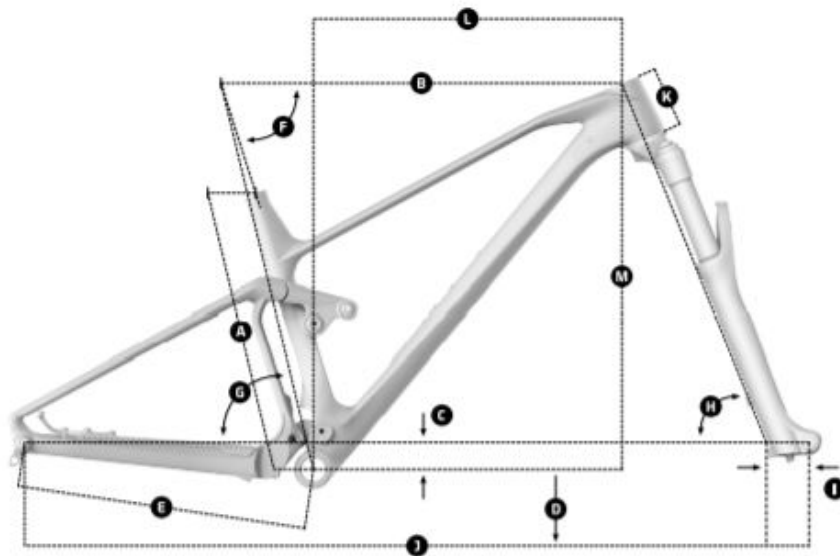

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	390 mm	420 mm	470 mm	510 mm
B Top Tube Length	583 mm	603 mm	629 mm	654 mm
C Bottom Bracket Drop	-31 mm	-31 mm	-31 mm	-31 mm
D Bottom Bracket Height	337 mm	337 mm	337 mm	337 mm
E Chainstay Length	432 mm	432 mm	432 mm	432 mm
F Seat Tube Angle, Actual	70.8°	70.8°	70.8°	70.8°
G Seat Tube Angle, Effective	75.1°	75.1°	75.1°	75.1°
H Head Tube Angle	66.8°	66.8°	66.8°	66.8°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1146 mm	1167 mm	1191 mm	1217 mm
K Head Tube Length	85 mm	90 mm	100 mm	115 mm
L Reach	430 mm	450 mm	470 mm	490 mm
M Stack	577mm	582mm	591 mm	605mm