

# CRAFTY CARBON RR SL, CARBON/BLACK/SILVER, 2021

obj. č: 010.21267



Doporučená cena

**337.999 Kč**

## Technické specifikace

### barva rámečku

carbon/black/silver

### vyráběné velikosti

S 380mm / M 420mm / L 450mm / XL 490mm

### hmotnost

20,1 Kg

### rám

Crafty Stealth Air full Carbon, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal non-removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers.

### vidlice

Fox 36 29 Float FIT4 EVOL Factory Kashima, 160mm, e-bike optimized, tapered steerer tube, Boost 15x110mm axle, 44mm offset, 68mm OD crown. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

### hlavové složení

Acros custom for 1-1/2 head tube, angular contact bearings 40x52x7, Internal cable routing

### přehazovačka

Sram X01 Eagle AXS, Type 2.1 roller bearing clutch, cage lock, long carbon cage, 1x12s, X-actuation 1:1

### řazení

Sram Eagle AXS, 12s

### brzdové páčky

Shimano XTR M9120, ergonomic antiskid lever with servo wave, tool less reach adjust, free stroke adjust

### kliky

E.13 TRS Race carbon ebike, 165mm

### řídítka

Onoff Krypton Carbon 1.0, rise: 25mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore, Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

### představec

Onoff Krypton FG 30mm, 6061 forged alloy, 31.8mm barbore

### sedlovka

RockShox Reverb Stealth AXS, diameter 31.6mm, S size: 390x125mm, M size: 440x150mm, L/XL size: 440x170mm

### sedlo

FIZIK ANTARES LARGE R1

### náboj přední

DT 240, Boost 15x110mm, CenterLock

### náboj zadní

DT 240, Boost 12x148mm, 24T Ratchet system, CenterLock

### řetěz

Sram GX Eagle, 12s, Powerlock

### kazeta

Sram XG-1295, 10-50T, 12s

### dráty

DT Hybrid SP, straightpull

### ráfky

DT Swiss HXC1200 Carbon Spline 29, 30mm internal width, hookless, tubeless ready, 28 spokes

obj.c.  
010.21267

**přední brzda**  
Shimano XTR M9120, 4 piston caliper, MT900 ICE-Tech 203mm CenterLock rotor, resin pads with fin

**omotávka**  
Maxxis Rekon 29x2.6, tubeless ready, 3C MAXX TERRA, EXO+ Protection, 120TPI, folding bead

**převodník**  
Sram X-Sync 2 Eagle 34T, alloy, narrow-wide, 104 BCD

**motor+baterie**  
Bosch Performance Line CX Cruise (25Km/h) GEN4, computer  
Bosch Kiox, Bosch Powertube 625Wh


**tlumič**  
Fox Float DPS Factory Kashima, 205x65mm. Settings:  
Compression 3 positions lever, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings

**zadní brzda**  
Shimano XTR M9120, 4 piston caliper, MT910 ICE-Tech 203mm CenterLock rotor, resin pads with fin

**nastavení tlumiče**  
Medium compression, Medium rebound, 0.4 volume spacer

**patka k přehazovačce**  
Mondraker M068

Geometrie

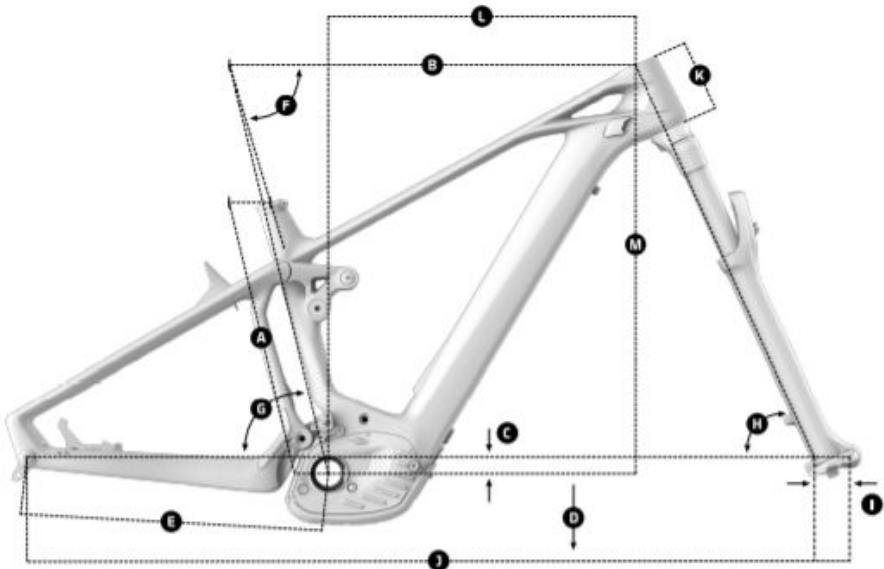

GEOMETRY

| Size                         | S       | M       | L       | XL      |
|------------------------------|---------|---------|---------|---------|
| A Seat Tube Length           | 380 mm  | 420 mm  | 450 mm  | 480 mm  |
| B Top Tube Length            | 605 mm  | 625 mm  | 650 mm  | 670 mm  |
| C Bottom Bracket Drop        | -25 mm  | -25 mm  | -25 mm  | -25 mm  |
| D Bottom Bracket Height      | 350 mm  | 350 mm  | 350 mm  | 350 mm  |
| E Chainstay Legth            | 455 mm  | 455 mm  | 455 mm  | 455 mm  |
| F Seat Tube Angle, Actual    | 73.5°   | 73.5°   | 73.5°   | 73. 5°  |
| G Seat Tube Angle, Effective | 76°     | 76°     | 76°     | 76°     |
| H Head Tube Angle            | 65.5°   | 65.5°   | 65.5°   | 65.5°   |
| I Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| J Wheelbase                  | 1225 mm | 1245 mm | 1270 mm | 1290 mm |
| K Head Tube Length           | 110 mm  | 110 mm  | 130 mm  | 130 mm  |
| L Reach                      | 450 mm  | 470 mm  | 490 mm  | 510 mm  |
| M Stack                      | 622 mm  | 622 mm  | 640 mm  | 640 mm  |